

MSU PAISLEY COURT HOUSING




101 PAISLEY COURT BOZEMAN, MT, 59715

ISSUE DATE: 03/29/2024

21-0143

21-0143

MSU PPA NUMBER: A&E PROJECT NUMBER:

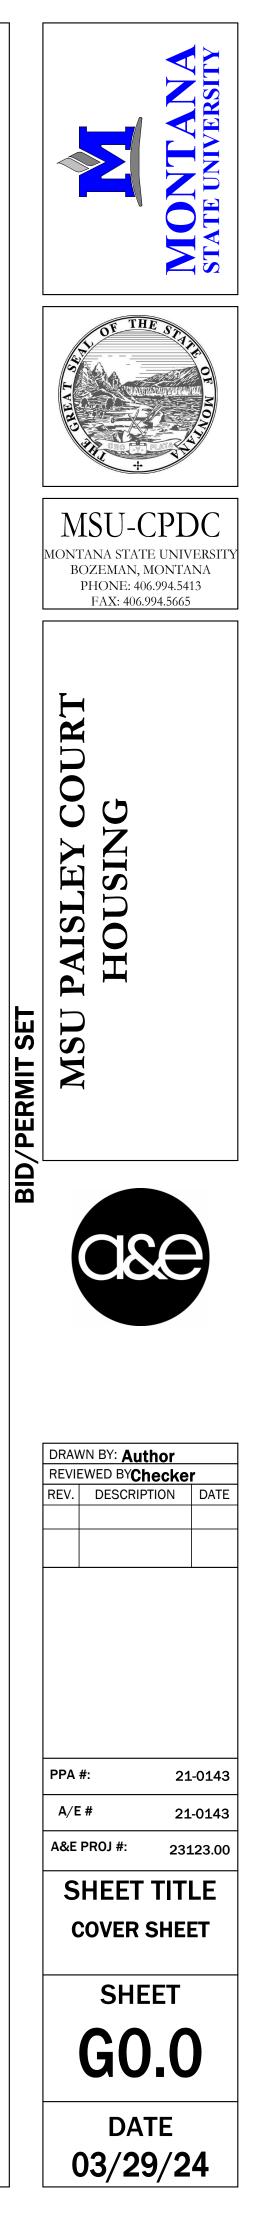


ARCHITECTURAL ABBREVIATIONS

ADDL ADJ AFF	ANCHOR BOLT ABOVE AIR CONDITIONING ACOUSTICAL CEILING TILE ADDITIONAL ADJUSTABLE ABOVE FINISH FLOOR ALTERNATE ALUMINUM ARCHITECT(URAL) AWNING
BD BLDG BLKG BM BRG BTWN	BOTTOM OF BOARD BUILDING BLOCKING BEAM OR BENCHMARK BEARING BETWEEN BUILT-UP ROOF
CJ CL CLG CMU CO COL CONC CONT CONST CG CPT	CABINET CONTROL JOINT CENTERLINE CEILING CONCRETE MASONRY UNIT CLEAN OUT COLUMN CONCRETE CONTINUOUS CONSTRUCTION CORNER GUARD CARPET CASEMENT CERAMIC TILE
DF	DEEP DRINKING FOUNTAIN DOUBLE HUNG DIMENSIONS DISPENSER DOWN DOOR DOWNSPOUT DETAIL DRAWING
	EAST EACH EXISTING COLUMN EXPANSION JOINT ELECTRICAL ELEVATION ELEVATOR EQUAL EQUIPMENT ELECTRIC WATER COOLER EXHAUST EXISTING EXPANSION OR EXPOSED EXTERIOR
FACP FD FE FEC F.F. FIN FIXT FLR FND FP FR FRMG FT FTG FTNG FTNG FRP FRT	FIRE ALARM CONTROL PANEL FLOOR DRAIN FIRE EXTINGUISHER FIRE EXTINGUISHER CABINET FINISH FLOOR FINISH FIXTURE FLOOR FOUNDATION FIRE PROTECTION FRAME FRAMING FEET/FOOT OR FIRE TREATED FOOTING FIBERGLASS REINFORCED PANEL FIRE RETARDANT TREATED


~	
GA GALV GB GC GL GWB GYP	GAUGE GALVANIZED GYPSUM BOARD GENERAL CONTRACTOR GLASS, GLAZING GYPSUM WALL BOARD GYPSUM
HDW HM HORIZ HR HT HTD	HANDICAP HEADER HARDWARE HOLLOW METAL HORIZONTAL HOUR HEIGHT HEATED HEATING/VENTILATION & AIR CONDITIONING
ID INFO ISO INSUL INT INV	INSIDE DIAMETER INFORMATION ISOCYANURATE INSULATE / INSULATED / INSULATION INTERIOR INVERT
JT J-BOX	JOINT JUNCTION BOX
KIT	KITCHEN
L LAM LAV LF LT	LONG / LENGTH LAMINATE(D) LAVATORY LINEAR FEET LIGHT
MATL	MASONRY MATERIAL MAXIMUM MECHANIC(AL) MEZZANINE MANUFACTURER MANHOLE MINIMUM MISCELLANEOUS MASONRY OPENING METAL
N NIC NOM NTS	NORTH NOT IN CONTRACT NOMINAL NOT TO SCALE
OC OD	ON CENTER OUTSIDE DIAMETER OR OVERFLOW
OPNG OPP OSB OVHD	DRAIN OPENING OPPOSITE ORIENTED STRAND BOARD OVERHEAD
PL PLAM PLUMB PLYWD PNL PNT POLY PSF PSI PT PVMT	PANEL PAINT
QT QTR QTY	QUARRY TILE QUARTER QUANTITY

RD RECY REF REFRIG REINF	RADIUS RETURN AIR RUBBER BASE ROOF DRAIN RECYCLE(D) REFERENCE REFRIGERATOR OR REFRIGERATION REINFORCE REQUIRED ROOM ROUGH OPENING RIGHT OF WAY
SECT SF SFRM SGL SHT SHTG SIM SPECS SOD SOG SOH SS ST STD STD STL	SCHEDULED SECTION SQUARE FEET
THK THRESH T.O. TOBM T.O.BM. T.O.P. T.O.S. T/ T&G TEL THK	TEMPERED THICK THRESHOLD TOP OF TOP OF BEAM TOP OF BEAM TOP OF PLATE TOP OF STEEL TOP OF TONGUE AND GROOVE TELEPHONE THICK TRANSOM TELEVISION TYPICAL
UL UNO	UNDERWRITERS LABORATORY UNLESS NOTED OTHERWISE
VCT VERT VEST VIF VP VR	VINYL BASE VINYL COMPOSITION TILE VERTICAL VESTIBULE VERIFY IN FIELD VENEER PLASTER VAPOR RETARDER VINYL TILE VINYL WALL COVERING
WDW WG WH W/IN W/O WP WR WR WT WWF	WIDE OR WEST WITH WATER CLOSET WOOD WINDOW WALL GUARD WATER HEATER WITHIN WITHOUT WATERPROOF WATER RESISTANT WEIGHT WELDED WIRE FABRIC
# @	NUMBER OR POUND AT

EXPLANATION OF SYMBOLS

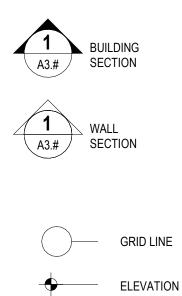

 $\langle XXX-X \rangle$ CEILING TAG X'-X" **REVISION CLOUD** $\langle xxx \rangle$ CASEWORK TAG W^{\sim}



1	2
5	6
9	10
13	14

ARCH D (24"x36")

DISCLAIMER:

BY OTHERS.

ALTERNATES

2021 INTERNATIONAL FIRE CODE (IFC) 2021 INTERNATIONAL MECHANICAL CODE (IMC) 2021 INTERNATIONAL FUEL GAS CODE (IFGC) 2021 UNIFORM PLUMBING CODE 2020 NATIONAL ELECTRICAL CODE

PROJECT TEAM

OWNER

MONTANA STATE UNIVERSITY PO BOX 172760 BOZEMAN, MT 59717 CONTACT: DONNY BEEBE


PROJECT MANAGER DONALD.BEEBE@MONTANA.EDU

ARCHITECT

A&E ARCHITECTS 515 W. ASPEN ST. SUITE 200A BOZEMAN, MT 59715 406.453.7310

CONTRACTOR

TBD

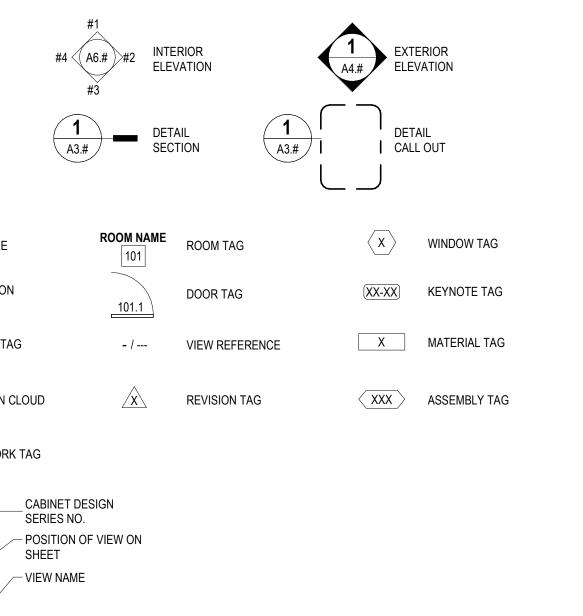

SUSTAINABILITY NOTES

- REPETITIVE AND/OR INTERMITTENT HIGH-LEVEL NOISE PERMITTED ONLY DURING DAYTIME. AT 50'-0" FROM THE PROJECT BOUNDARY DO NOT EXCEED 70 DB(A) FOR MORE THAN 12 MINUTES IN ANY HOUR.
- MAXIMUM AMBIENT NOISE LEVELS (DB) FOR NOISE AREA AT PROJECT BOUNDARY: DAYLIGHT HOURS 65 DB, NON-DAYLIGHT HOURS 45 DB.
- DEVELOP A WASTE MANAGEMENT PLAN ACCORDING TO ASTM E 1609. PLAN SHALL CONSIST OF WASTE IDENTIFICATION, WASTE REDUCTION WORK PLAN, AND COST/REVENUE ANALYSIS. DISTINGUISH BETWEEN CONSTRUCTION WASTES. INDICATE QUANTITIES BY WEIGHT OR VOLUME, BUT USE SAME UNITS OF MEASURE THROUGHOUT WASTE MANAGEMENT PLAN.
- DEVELOP A WASTE REDUCTION WORK PLAN. IDENTIFY NON-HAZARDOUS DEMOLITION AND CONSTRUCTION WASTE GENERATED BY THE PROJECT AND WHETHER IT WILL BE SALVAGED, RECYCLED, OR DISPOSED OF IN LANDFILL. INCLUDE QUANTITY OF EACH TYPE OF WASTE, QUANTITY FOR EACH MEANS OF RECOVERY, AND HANDLING AND TRANSPORTATION PROCEDURES.
- RECYCLED MATERIALS: DIVERT, AT A MINIMUM, 50% OF RESULTING WASTE FROM A LANDFILL THROUGH SALVAGE AND RECYCLING. SEPARATE RECYCLABLE WASTE FROM OTHER WASTE MATERIALS, TRASH, AND DEBRIS.
- DEVELOP A CONSTRUCTION IAQ MANAGEMENT PLAN. AT A MINIMUM, SCHEDULE OF INSTALLATION OF INTERIOR FINISHES, IDENTIFY SOURCES OF ODOR AND DUST. NOTE CONSTRUCTION VENTILATION PROVIDED INCLUDING USE OF PERMANENT HVAC SYSTEMS, TYPES OF FILTRATION AND SCHEDULE FOR REPLACEMENT OF FILTERS, CLEANING AND DUST CONTROL PROCEDURES, PRODUCTS REQUIRING MOISTURE PROTECTION, AND SCHEDULE FOR INSPECTION OF STORED MATERIALS.
- DEVELOP A TEMPORARY SEDIMENTATION CONTROL PLAN. INDICATE DEVICES. MEASURES, AND LOCATIONS FOR SEDIMENT CONTROL DEVICES, DESCRIBE CONSTRUCTION ACTIVITIES EFFECTING EROSION, DESCRIBE MONITORING AND MEASURES FOR SEDIMENT CONTROL, DESCRIBE MITIGATION AND RESPONSE TO FAILED EROSION CONTROL MEASURES.
- LOW EMITTING MATERIALS. PAINTS, COATINGS, ADHESIVES AND SEALANTS FOR FIELD APPLICATIONS INSIDE THE WEATHER PROOFING SYSTEM SHALL COMPLY WITH VOC CONTENT LIMITS OF AUTHORITIES HAVING JURISDICTIONS OR SCAQMD RULE 1168, WHICHEVER IS STRICTER.
- NO SMOKING. SMOKING, VAPING, AND SMOKELESS TOBACCO USE IS NOT PERMITTED WITHIN THE BUILDING, OR WITHIN 25'-0" OF ENTRANCES, OPERABLE WINDOWS, OR OUTDOOR AIR INTAKES.
- ALL COMPOSITE WOOD PRODUCTS SHALL BE MANUFACTURED WITHOUT ADDED UREA FORMALDEHYDE.

10

TYPICAL SHEET VIEW NUMBERING LAYOUTS

3	4	
7	8	
11	12	
15	16	

A&E DESIGN MAKES NO REPRESENTATION AS TO THE COMPLETENESS, APPROPRIATENESS, OR COORDINATION OF INFORMATION PROVIDED BY, AND IS NOT LIABLE FOR, THE WORK OF CONSULTANTS CONTRACTUALLY ENGAGED

BASE BID: REMOVE EXISTING DRIP EDGE FLASHING AND PROVIDE NEW FLASHING TUCKED UNDER EXISTING ROOFING AND FACE-ATTACHED THROUGH FASCIA PANEL.

ALTERNATE #1: REMOVE 3'-0" OF SHINGLES ALONG ALL ROOF EDGES TO ALLOW FOR INSTALLATION OF NEW DRIP EDGE FLASHING AND NEW UNDERLAYMENT. UNDERLAYMENT TO LAP OVER EXISTING UNDERLAYMENT, CONFIRM EXISTING IN FIELD. PROVIDE NEW SHINGLES TO MATCH EXISTING.

APPLICABLE CODES AND ORDINANCES


2021 INTERNATIONAL BUILDING CODE (IBC) 2021 INTERNATIONAL ENERGY CONSERVATION CODE


2017 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES (ICC/ANSI 117.1)

ARCHITECTURAL DRAWINGS

SHEET NO.	SHEET NAME
G0.0 G0.1 D2.1 D2.2 A1.1 A2.1 A2.2 A4.1 A4.2 A7.1	COVER SHEET GENERAL INFORMATION LEVEL 1 DEMOLITION PLAN ROOF DEMOLITION PLAN SITE PLAN LEVEL 1 FLOOR PLAN ROOF PLAN EXTERIOR ELEVATIONS EXTERIOR ELEVATIONS EXTERIOR ELEVATIONS REFLECTED CEILING PLANS
A9.1	SCHEDULES DETAILS

NOTE: TENANTS WILL OCCUPY THE BUILDINGS. PLEASE SEE NOTICE OF OCCUPANCY LETTER IN THE BID DOCUMENTS.

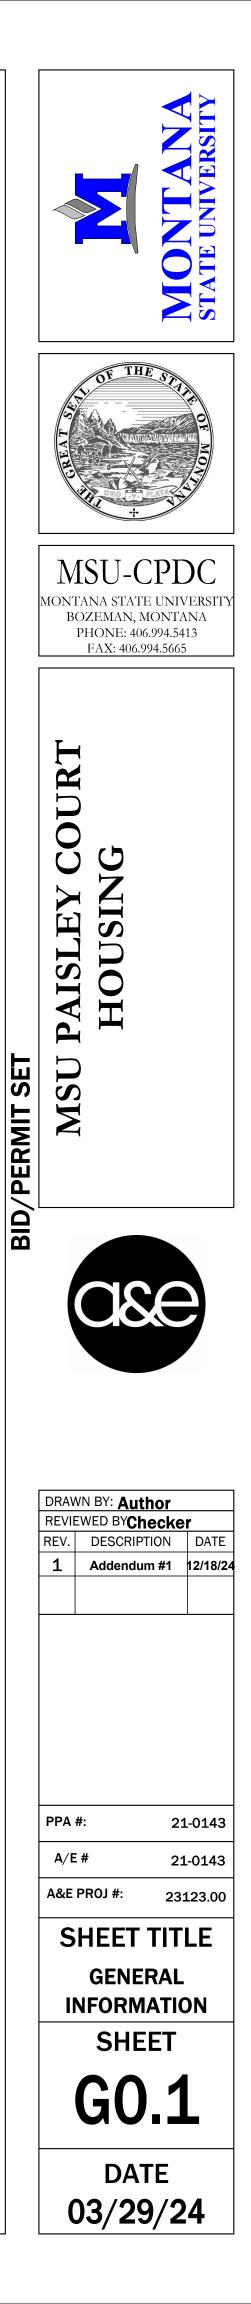

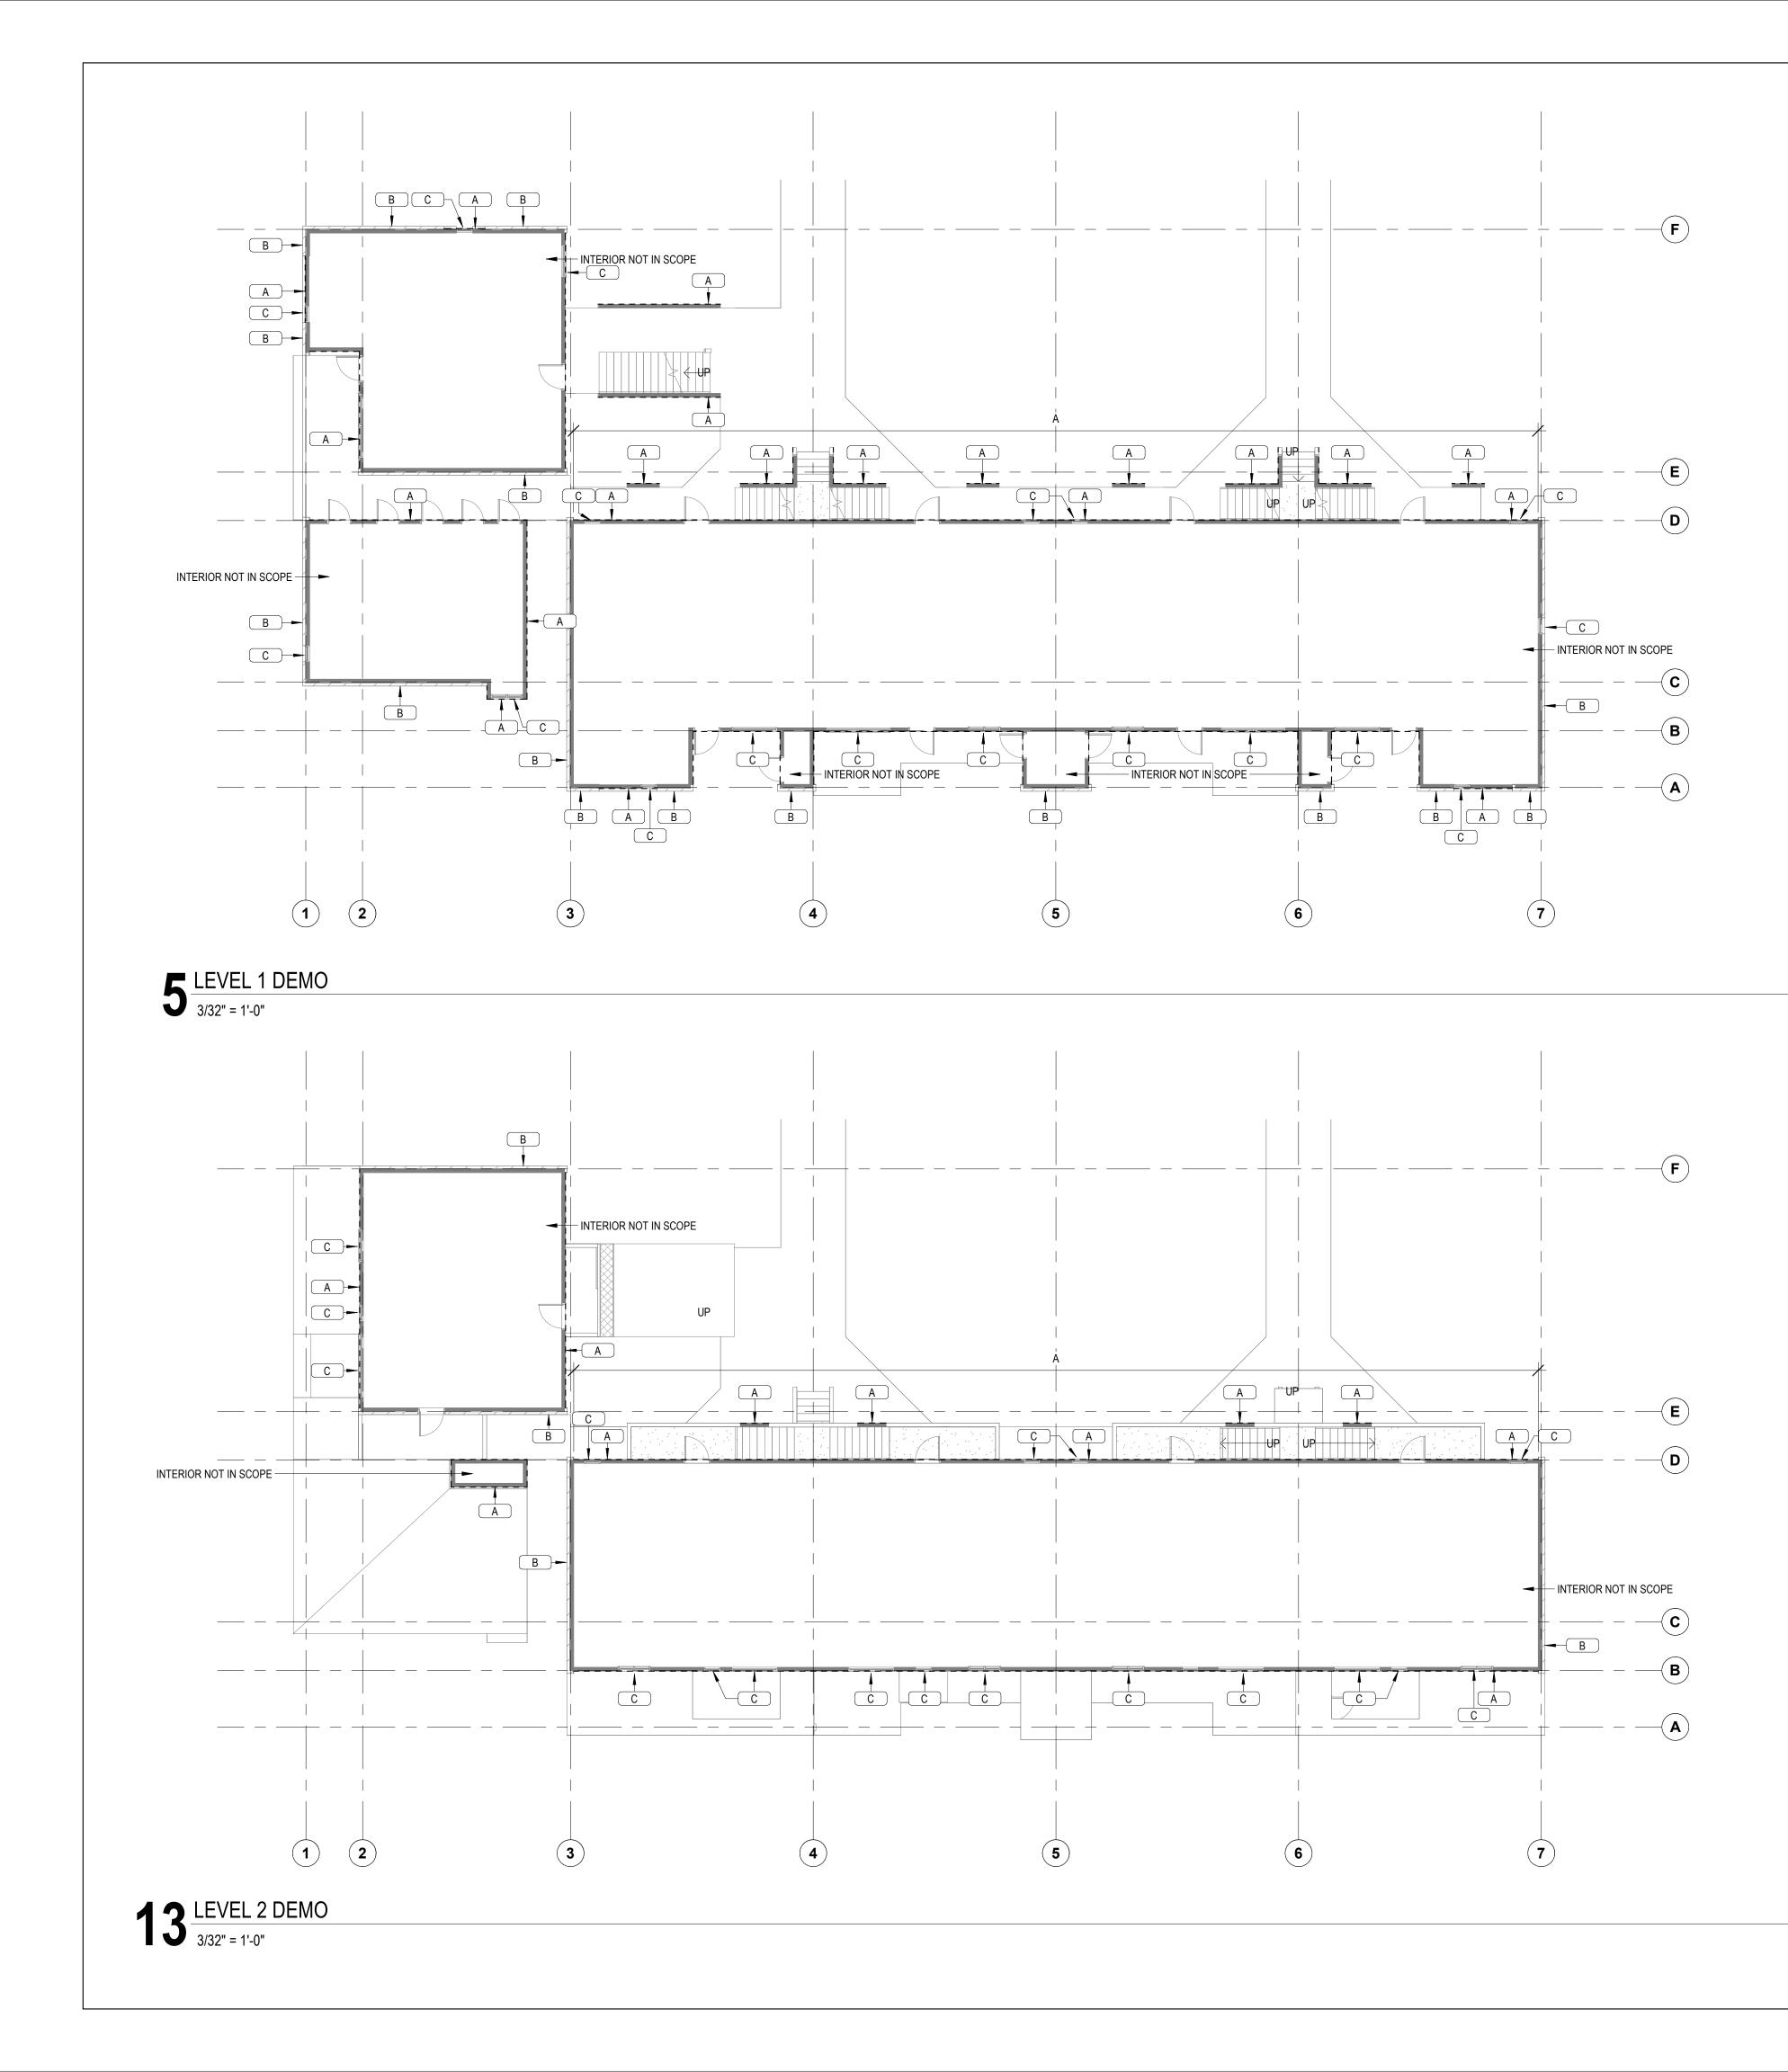





GENERAL NOTES

101 BUILDING 'B/C' & 102 BUILDING 'B/C' ARE MIRRORED VERSIONS OF TYPICAL BUILDING.
 GUTTERS AND DOWNSPOUTS TO BE REMOVED AND REPLACED THROUGHOUT

KEYNOTES

A REMOVE EXISTING SIDING DOWN TO EXTERIOR SHEATHING, INCLUDING ALL TRIM PIECES, SOFFIT BOARDS, FLASHING, AND ANY EXISTING BUILDING WRAP.

B PROTECT EXISTING BRICK TO REMAIN.

C REMOVE EXSTING WINDOWS, INCLUDING FLASHING AS REQUIRED FOR INSTALLATION OF NEW WINDOWS.

DEMOLITION LEGEND



- --- INDICATES BUILT ITEM TO BE REMOVED
- O

DEMOLITION NOTES

- IT IS THE CONTRACTOR'S RESPONSIBILITY TO FAMILIARIZE HIMSELF/ HERSELF WITH THE SCOPE OF WORK. THE DEMOLITION NOTES PROVIDE A GENERAL DESCRIPTION OF THE ITEMS AND AREAS REQUIRING REMOVAL. THE CONTRACTOR SHALL FIELD VERIFY ACTUAL QUANTITIES AND
- LOCATIONS OF ALL INDICATED ITEMS AS NECESSARY TO COMPLETE THE SCOPE OF WORK IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.
- COORDINATE WITH OWNER FOR ANY EQUIPMENT TO BE SALVAGED. UNLESS SPECIFICALLY SCHEDULED FOR REUSE, DEMOLISHED MATERIALS SHALL BECOME THE POSSESSION OF THE CONTRACTOR AND SHALL BE IMMEDIATELY REMOVED FROM THE SITE.
- REMOVE MATERIALS FROM SITE AND DISPOSE OF IN A LEGAL MANNER AT NO ADDITIONAL EXPENSE TO OWNER
- DEBRIS FROM THE DEMOLITION SHALL NOT BE ALLOWED TO ACCUMULATE WITHIN THE BUILDING OR ON THE SITE.
- REMOVE FROM SITE ANY CONTAMINATED, VERMIN INFESTED, OR DANGEROUS MATERIALS ENCOUNTERED AND DISPOSE OF BY SAFE MEANS SO AS NOT TO ENDANGER HEALTH OF WORKERS AND PUBLIC.
- BURNING OF MATERIALS ON SITE IS NOT PERMITTED.

1

12.


13


14

18.

22.

- CLEAN-UP: MUST MEET GOVERNING DUST CONTROL CODE
- NOTIFY AFFECTED UTILITY COMPANIES BEFORE STARTING WORK AND COMPLY WITH THEIR REQUIREMENTS.
- PREVENT MOVEMENT OR SETTLEMENT OF ADJACENT STRUCTURES. PROVIDE BRACING AND SHORING.
- CARRY OUT DEMOLITION WORK TO CAUSE AS LITTLE INCONVENIENCE TO ANY ADJACENT OCCUPIED BUILDING OR SITE AS POSSIBLE AND WITH MINIMUM INTERFERENCE TO PUBLIC OR PRIVATE ACCESSES. MAINTAIN PROTECTED EGRESS AND ACCESS AT ALL TIMES.
- CONTRACTOR SHALL PROVIDE TEMPORARY DUST AND CONSTRUCTION SEPARATION WALLS AS REQUIRED TO SHIELD THE PUBLIC FROM NOISE, DUST, WEATHER, AND OTHER HAZARDS THAT MAY BE EXPOSED AS A RESULT OF THE DEMOLITION WORK.
- CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO INSURE EXISTING STRUCTURAL ELEMENTS REMAIN UNDAMAGED THROUGHOUT CONSTRUCTION, UNLESS SPECIFICALLY NOTED ON DEMOLITION PLAN. IT IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR TO IDENTIFY AND PROVIDE ANY SHORING, BRACING, OR TEMPORARY STRUCTURE, AND TO COORDINATE WITH STRUCTURAL ENGINEER AS REQUIRED.
- ALL PUBLIC UTILITIES TO REMAIN IN OPERATION THROUGHOUT CONSTRUCTION. CONTRACTOR TO COORDINATE ANY TEMPORARY SERVICES REQUIRED TO MAINTAIN BUSINESS OPERATIONS.
- FIRE SAFETY MUST BE MAINTAINED FOR ALL PERSONNEL WORKING ON THE FLOOR. ALL FIRE STAIRS, ALARMS, SPEAKERS, ETC. MUST REMAIN ACCESSIBLE AND OPERABLE AT ALL TIMES. CONTRACTOR SHALL MAKE NECESSARY PROVISIONS TO PROTECT THIS EQUIPMENT. IMMEDIATELY NOTIFY BUILDING SECURITY AND BUILDING MANAGER OF DAMAGED OR DISABLED SYSTEMS AND REPAIR OR REPLACE DAMAGED SYSTEMS IMMEDIATELY.
- IF ANY QUESTIONS ARISE AS TO THE REMOVAL OF ANY MATERIAL, CLARIFY THE POINT IN QUESTION WITH THE OWNER BEFORE PROCEEDING. IMMEDIATELY STOP WORK IF HAZARDOUS MATERIALS ARE FOUND AND CONTACT THE OWNER'S REPRESENTATIVE.
- REMOVAL OF ANY EQUIPMENT, CABLING SWITCHES, AND CONDUIT PERTAINING TO DATA/COMMUNICATIONS AND TELEPHONE SHALL BE VERIFIED WITH TELEPHONE COMPANIES, SERVICE OWNER OR TENANT DATA/COMMUNICATIONS REPRESENTATIVE AS REQUIRED TO PREVENT NEW CONSTRUCTION DELAYS.
- PROVIDE FOR FIRE PROOFING REPAIR AS REQUIRED AT STRUCTURAL STEEL, TO THE ORIGINAL RATING WHERE CONSTRUCTION TRADES REMOVE EXISTING FIRE PROOFING. REPAIR ANY DAMAGE OR PENETRATIONS IN RATED ASSEMBLIES TO CONFORM TO THEIR ORIGINAL LISTING REQUIREMENTS AND TO MAINTAIN FIRE PROTECTION AND SEPARATION AS ORIGINALLY DESIGNED.
- AT COMPLETION OF DEMOLITION WORK, THE CONSTRUCTION AREA(S) SHALL BE LEFT IN "BROOM CLEAN" CONDITION. ALL DEBRIS AND MISCELLANEOUS MATERIAL SHALL BE REMOVED.
- CONTRACTOR SHALL BE RESPONSIBLE FOR PATCHING AND/OR REPAIRING ANY DAMAGE CAUSED BY HIM OR HIS SUBCONTRACTORS. REFINISH TO MATCH EXISTING ADJACENT FINISH, OR AS NOTED HEREIN.
- FOR AREAS NOT IN DEMOLITION SCOPE OF WORK, PROTECT AS REQUIRED, ALL SURFACES, EQUIPMENT, FIXTURES AND HARDWARE DURING DEMOLITION AND/OR CONSTRUCTION.
- PRIOR TO DEMOLITION, INVESTIGATE WALLS FOR CONCEALED PIPING AND INFORM OWNER/ARCHITECT OF ANY CONDITION NOT DOCUMENTED IN CONTRACT DRAWINGS. DEMO DESIGNATED WALL BASES, WALL FRAMING, BATT INSULATION AND GYPSUM BOARD. DEMO CONDUITS AND RECEPTACLES, REFERENCE ELECTRICAL DEMO PLAN FOR ADDITIONAL INFORMATION.

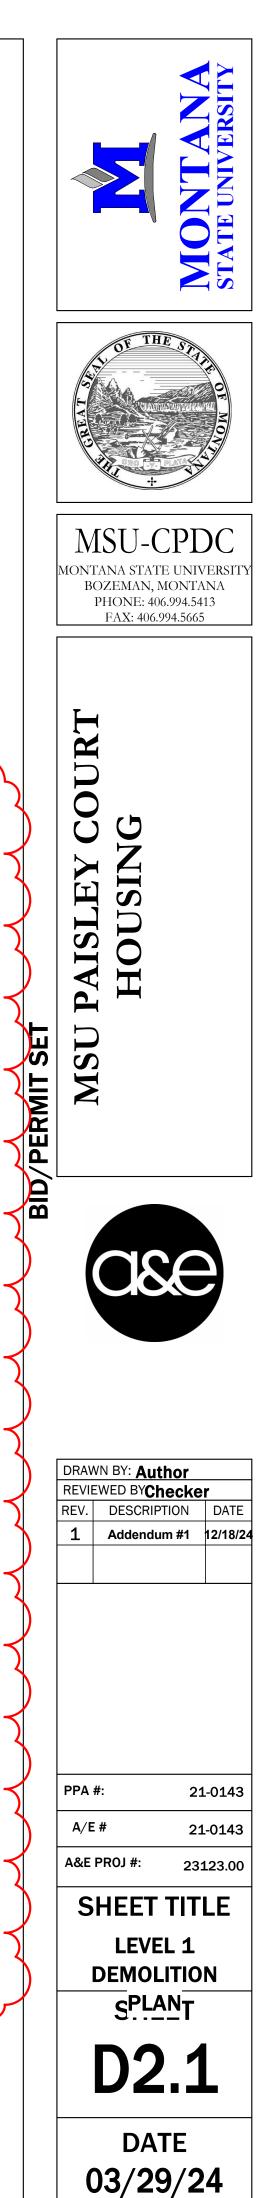

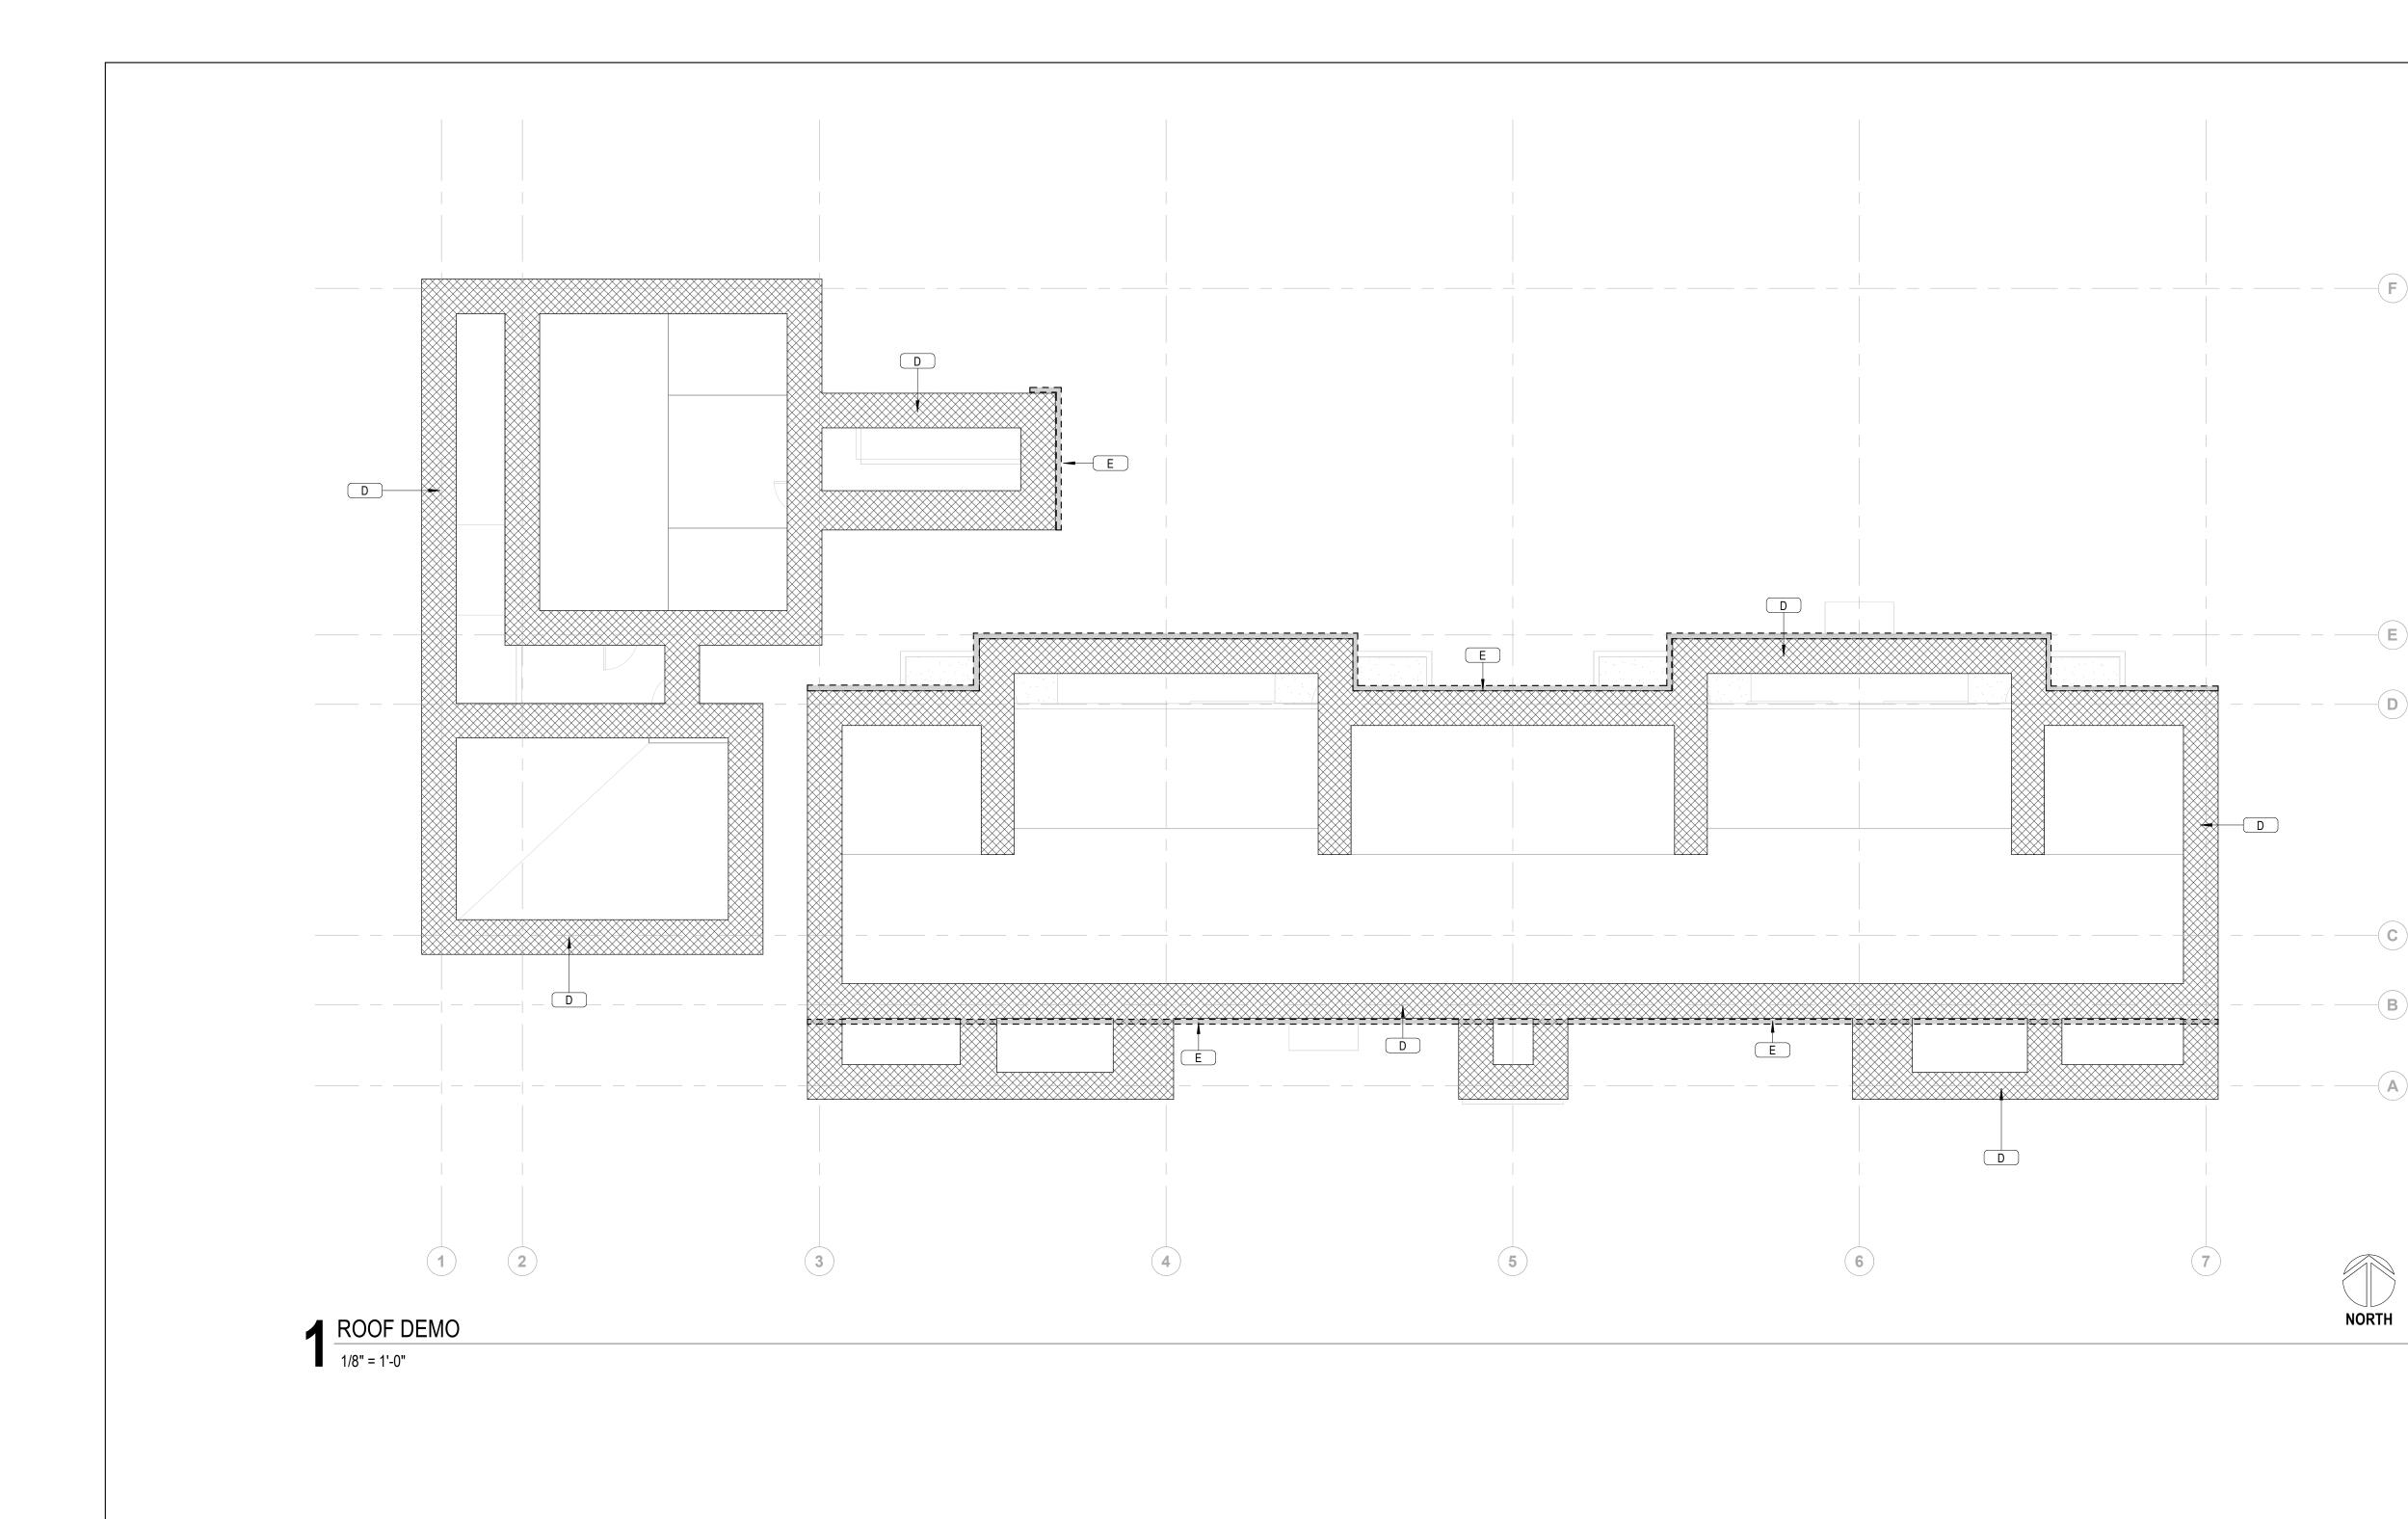



101 BUILDING 'B/C' & 102 BUILDING 'B/C' ARE MIRRORED VERSIONS OF TYPICAL BUILDING.
 GUTTERS AND DOWNSPOUTS TO BE REMOVED AND REPLACED THROUGHOUT

KEYNOTES

- D ALTERNATE #1: REMOVE AND LEGALLY DISPOSE OF 3'-0" OF SHINGLES AT ALL ROOF EDGES FOR INSTALLATION OF NEW DRIP EDGE FLASHING.
- E REMOVE AND LEGALLY DISPOSE OF ALL GUTTERS AND FASTENERS

DEMOLITION LEGEND

- HATCH INDICATES AREA NOT IN SCOPE OF WORK
- --- INDICATES BUILT ITEM TO BE REMOVED
- O

DEMOLITION NOTES

- IT IS THE CONTRACTOR'S RESPONSIBILITY TO FAMILIARIZE HIMSELF/ HERSELF WITH THE SCOPE OF WORK. THE DEMOLITION NOTES PROVIDE A GENERAL DESCRIPTION OF THE ITEMS AND AREAS REQUIRING REMOVAL. THE CONTRACTOR SHALL FIELD VERIFY ACTUAL QUANTITIES AND LOCATIONS OF ALL INDICATED ITEMS AS NECESSARY TO COMPLETE THE SCOPE OF WORK IN ACCORDANCE WITH THE CONTRACT DOCUMENTS. COORDINATE WITH OWNER FOR ANY EQUIPMENT TO BE SALVAGED. UNLESS SPECIFICALLY SCHEDULED FOR REUSE. DEMOLISHED MATERIALS SHALL RECOME THE POSSESSION OF THE
- SCHEDULED FOR REUSE, DEMOLISHED MATERIALS SHALL BECOME THE POSSESSION OF THE CONTRACTOR AND SHALL BE IMMEDIATELY REMOVED FROM THE SITE. REMOVE MATERIALS FROM SITE AND DISPOSE OF IN A LEGAL MANNER AT NO ADDITIONAL
- EXPENSE TO OWNER DEBRIS FROM THE DEMOLITION SHALL NOT BE ALLOWED TO ACCUMULATE WITHIN THE BUILDING OR ON THE SITE.
- REMOVE FROM SITE ANY CONTAMINATED, VERMIN INFESTED, OR DANGEROUS MATERIALS ENCOUNTERED AND DISPOSE OF BY SAFE MEANS SO AS NOT TO ENDANGER HEALTH OF WORKERS AND PUBLIC.
- BURNING OF MATERIALS ON SITE IS NOT PERMITTED.

10.

13.

14.

15.

16.

17.

18.

19.


20.

21.

22.


<u>/1</u>


- CLEAN-UP: MUST MEET GOVERNING DUST CONTROL CODES.
- NOTIFY AFFECTED UTILITY COMPANIES BEFORE STARTING WORK AND COMPLY WITH THEIR REQUIREMENTS.
- PREVENT MOVEMENT OR SETTLEMENT OF ADJACENT STRUCTURES. PROVIDE BRACING AND SHORING.
- CARRY OUT DEMOLITION WORK TO CAUSE AS LITTLE INCONVENIENCE TO ANY ADJACENT OCCUPIED BUILDING OR SITE AS POSSIBLE AND WITH MINIMUM INTERFERENCE TO PUBLIC OR PRIVATE ACCESSES. MAINTAIN PROTECTED EGRESS AND ACCESS AT ALL TIMES.
- CONTRACTOR SHALL PROVIDE TEMPORARY DUST AND CONSTRUCTION SEPARATION WALLS AS REQUIRED TO SHIELD THE PUBLIC FROM NOISE, DUST, WEATHER, AND OTHER HAZARDS THAT MAY BE EXPOSED AS A RESULT OF THE DEMOLITION WORK.
- CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO INSURE EXISTING STRUCTURAL ELEMENTS REMAIN UNDAMAGED THROUGHOUT CONSTRUCTION, UNLESS SPECIFICALLY NOTED ON DEMOLITION PLAN. IT IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR TO IDENTIFY AND PROVIDE ANY SHORING, BRACING, OR TEMPORARY STRUCTURE, AND TO COORDINATE WITH STRUCTURAL ENGINEER AS REQUIRED.
- ALL PUBLIC UTILITIES TO REMAIN IN OPERATION THROUGHOUT CONSTRUCTION. CONTRACTOR TO COORDINATE ANY TEMPORARY SERVICES REQUIRED TO MAINTAIN BUSINESS OPERATIONS.
- FIRE SAFETY MUST BE MAINTAINED FOR ALL PERSONNEL WORKING ON THE FLOOR. ALL FIRE STAIRS, ALARMS, SPEAKERS, ETC. MUST REMAIN ACCESSIBLE AND OPERABLE AT ALL TIMES. CONTRACTOR SHALL MAKE NECESSARY PROVISIONS TO PROTECT THIS EQUIPMENT. IMMEDIATELY NOTIFY BUILDING SECURITY AND BUILDING MANAGER OF DAMAGED OR DISABLED SYSTEMS AND REPAIR OR REPLACE DAMAGED SYSTEMS IMMEDIATELY.
- IF ANY QUESTIONS ARISE AS TO THE REMOVAL OF ANY MATERIAL, CLARIFY THE POINT IN QUESTION WITH THE OWNER BEFORE PROCEEDING. IMMEDIATELY STOP WORK IF HAZARDOUS MATERIALS ARE FOUND AND CONTACT THE OWNER'S REPRESENTATIVE.
- REMOVAL OF ANY EQUIPMENT, CABLING SWITCHES, AND CONDUIT PERTAINING TO DATA/COMMUNICATIONS AND TELEPHONE SHALL BE VERIFIED WITH TELEPHONE COMPANIES, SERVICE OWNER OR TENANT DATA/COMMUNICATIONS REPRESENTATIVE AS REQUIRED TO PREVENT NEW CONSTRUCTION DELAYS.
- PROVIDE FOR FIRE PROOFING REPAIR AS REQUIRED AT STRUCTURAL STEEL, TO THE ORIGINAL RATING WHERE CONSTRUCTION TRADES REMOVE EXISTING FIRE PROOFING. REPAIR ANY DAMAGE OR PENETRATIONS IN RATED ASSEMBLIES TO CONFORM TO THEIR ORIGINAL LISTING REQUIREMENTS AND TO MAINTAIN FIRE PROTECTION AND SEPARATION AS ORIGINALLY DESIGNED.
- AT COMPLETION OF DEMOLITION WORK, THE CONSTRUCTION AREA(S) SHALL BE LEFT IN "BROOM CLEAN" CONDITION. ALL DEBRIS AND MISCELLANEOUS MATERIAL SHALL BE REMOVED.
- CONTRACTOR SHALL BE RESPONSIBLE FOR PATCHING AND/OR REPAIRING ANY DAMAGE CAUSED BY HIM OR HIS SUBCONTRACTORS. REFINISH TO MATCH EXISTING ADJACENT FINISH, OR AS NOTED HEREIN.
- FOR AREAS NOT IN DEMOLITION SCOPE OF WORK, PROTECT AS REQUIRED, ALL SURFACES, EQUIPMENT, FIXTURES AND HARDWARE DURING DEMOLITION AND/OR CONSTRUCTION.
- PRIOR TO DEMOLITION, INVESTIGATE WALLS FOR CONCEALED PIPING AND INFORM OWNER/ARCHITECT OF ANY CONDITION NOT DOCUMENTED IN CONTRACT DRAWINGS. DEMO DESIGNATED WALL BASES, WALL FRAMING, BATT INSULATION AND GYPSUM BOARD. DEMO CONDUITS AND RECEPTACLES, REFERENCE ELECTRICAL DEMO PLAN FOR ADDITIONAL INFORMATION.

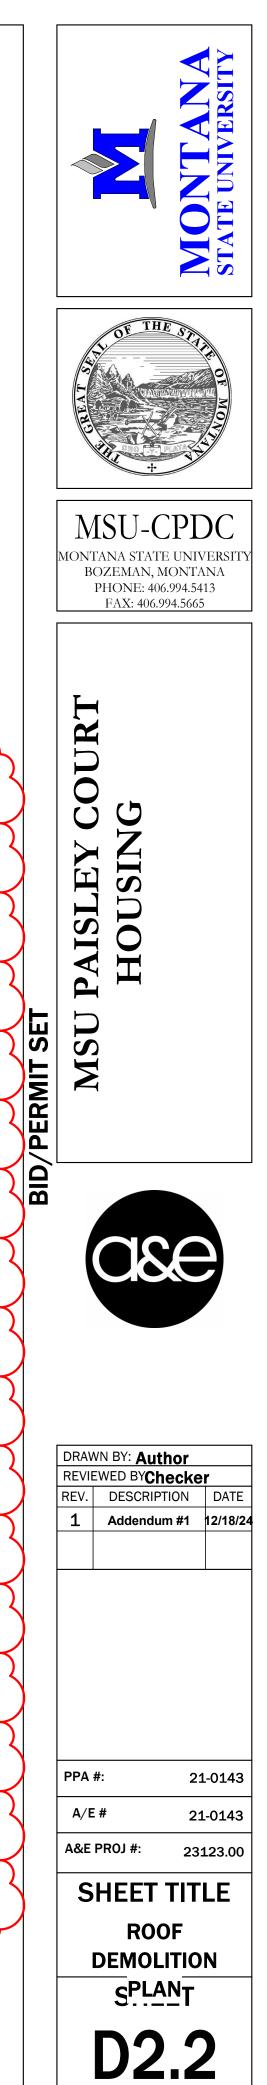

DATE

03/29/24

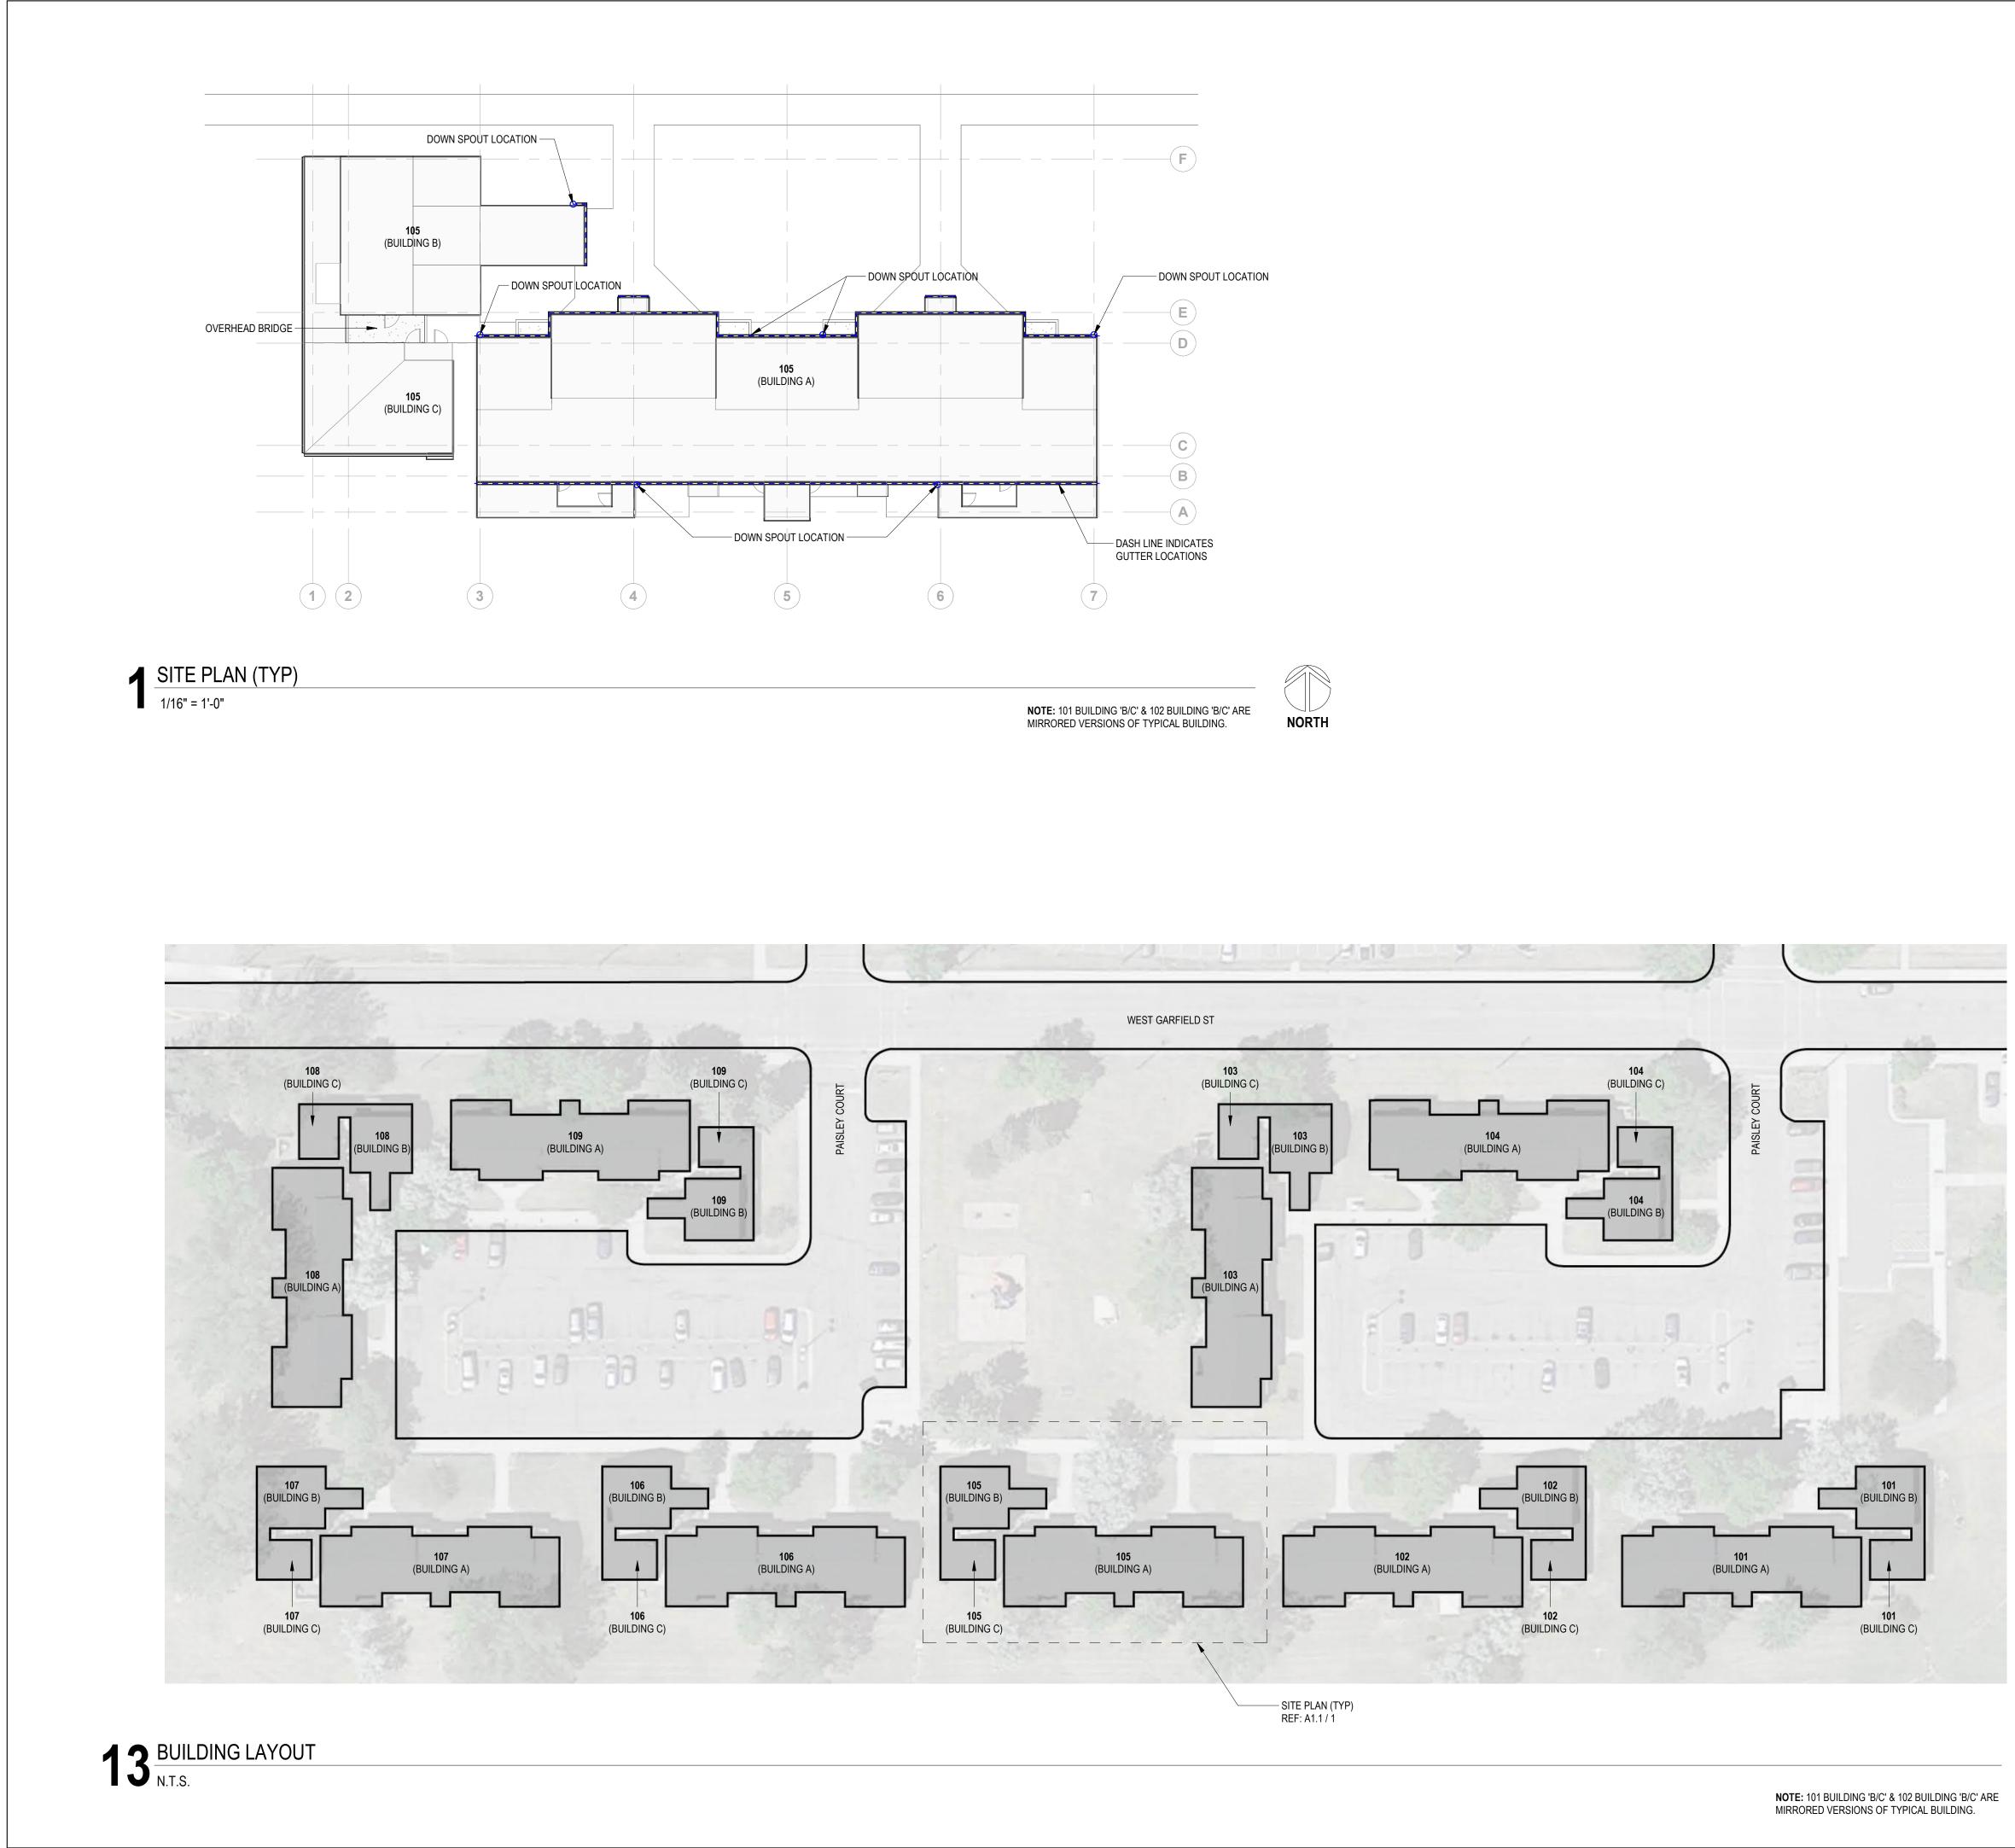

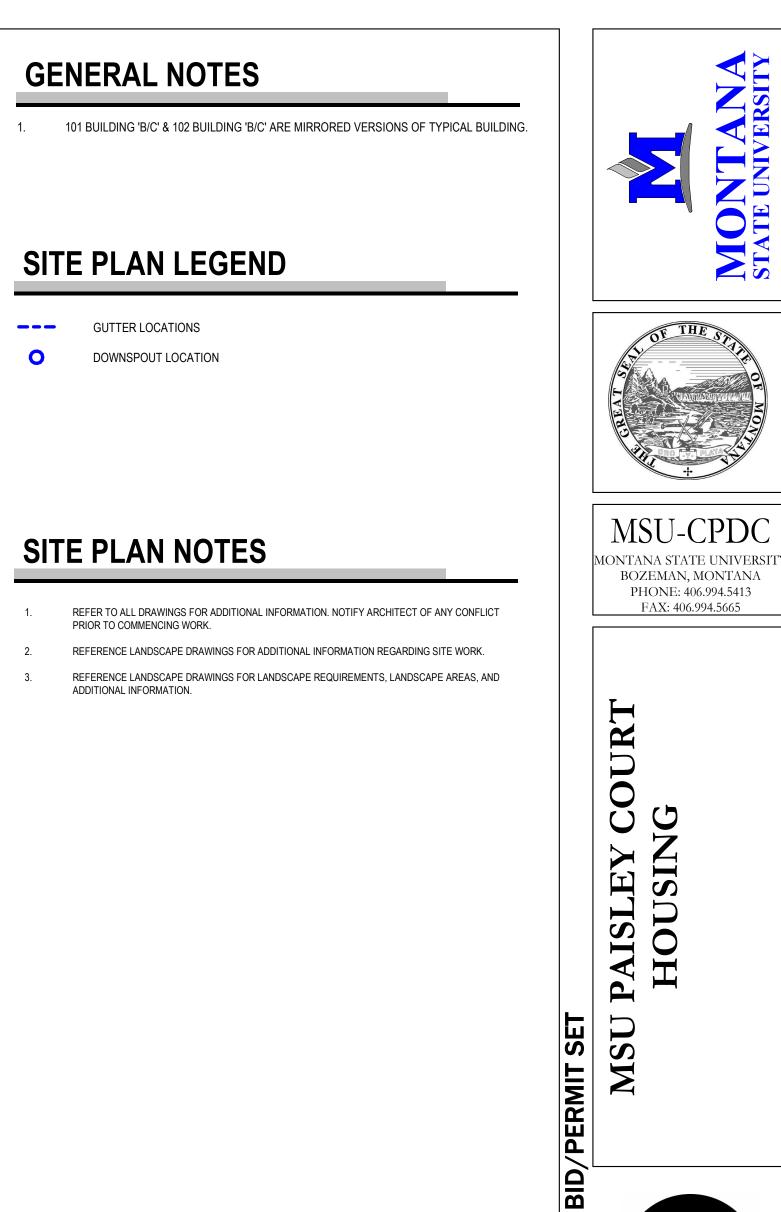



NNA RSITY


MONTA STATE UNIVE

OF THE STAN

BOZEMAN, MONTANA PHONE: 406.994.5413 FAX: 406.994.5665

DRAV	VN BY: Aut	hor	
REVII	EWED BY Ch	ecke	r
REV.	DESCRIP	TION	DATE
PPA	#:	21	-0143
A/E	:#	21	-0143
A&E	PROJ #:	231	23.00
S	HEET	ΤΙΤΙ	LE
	SITE P	'LAN	
	SHE	ET	
	Α1	1	
	AT		
	DA	ΓE	
()3/29	J/2	4



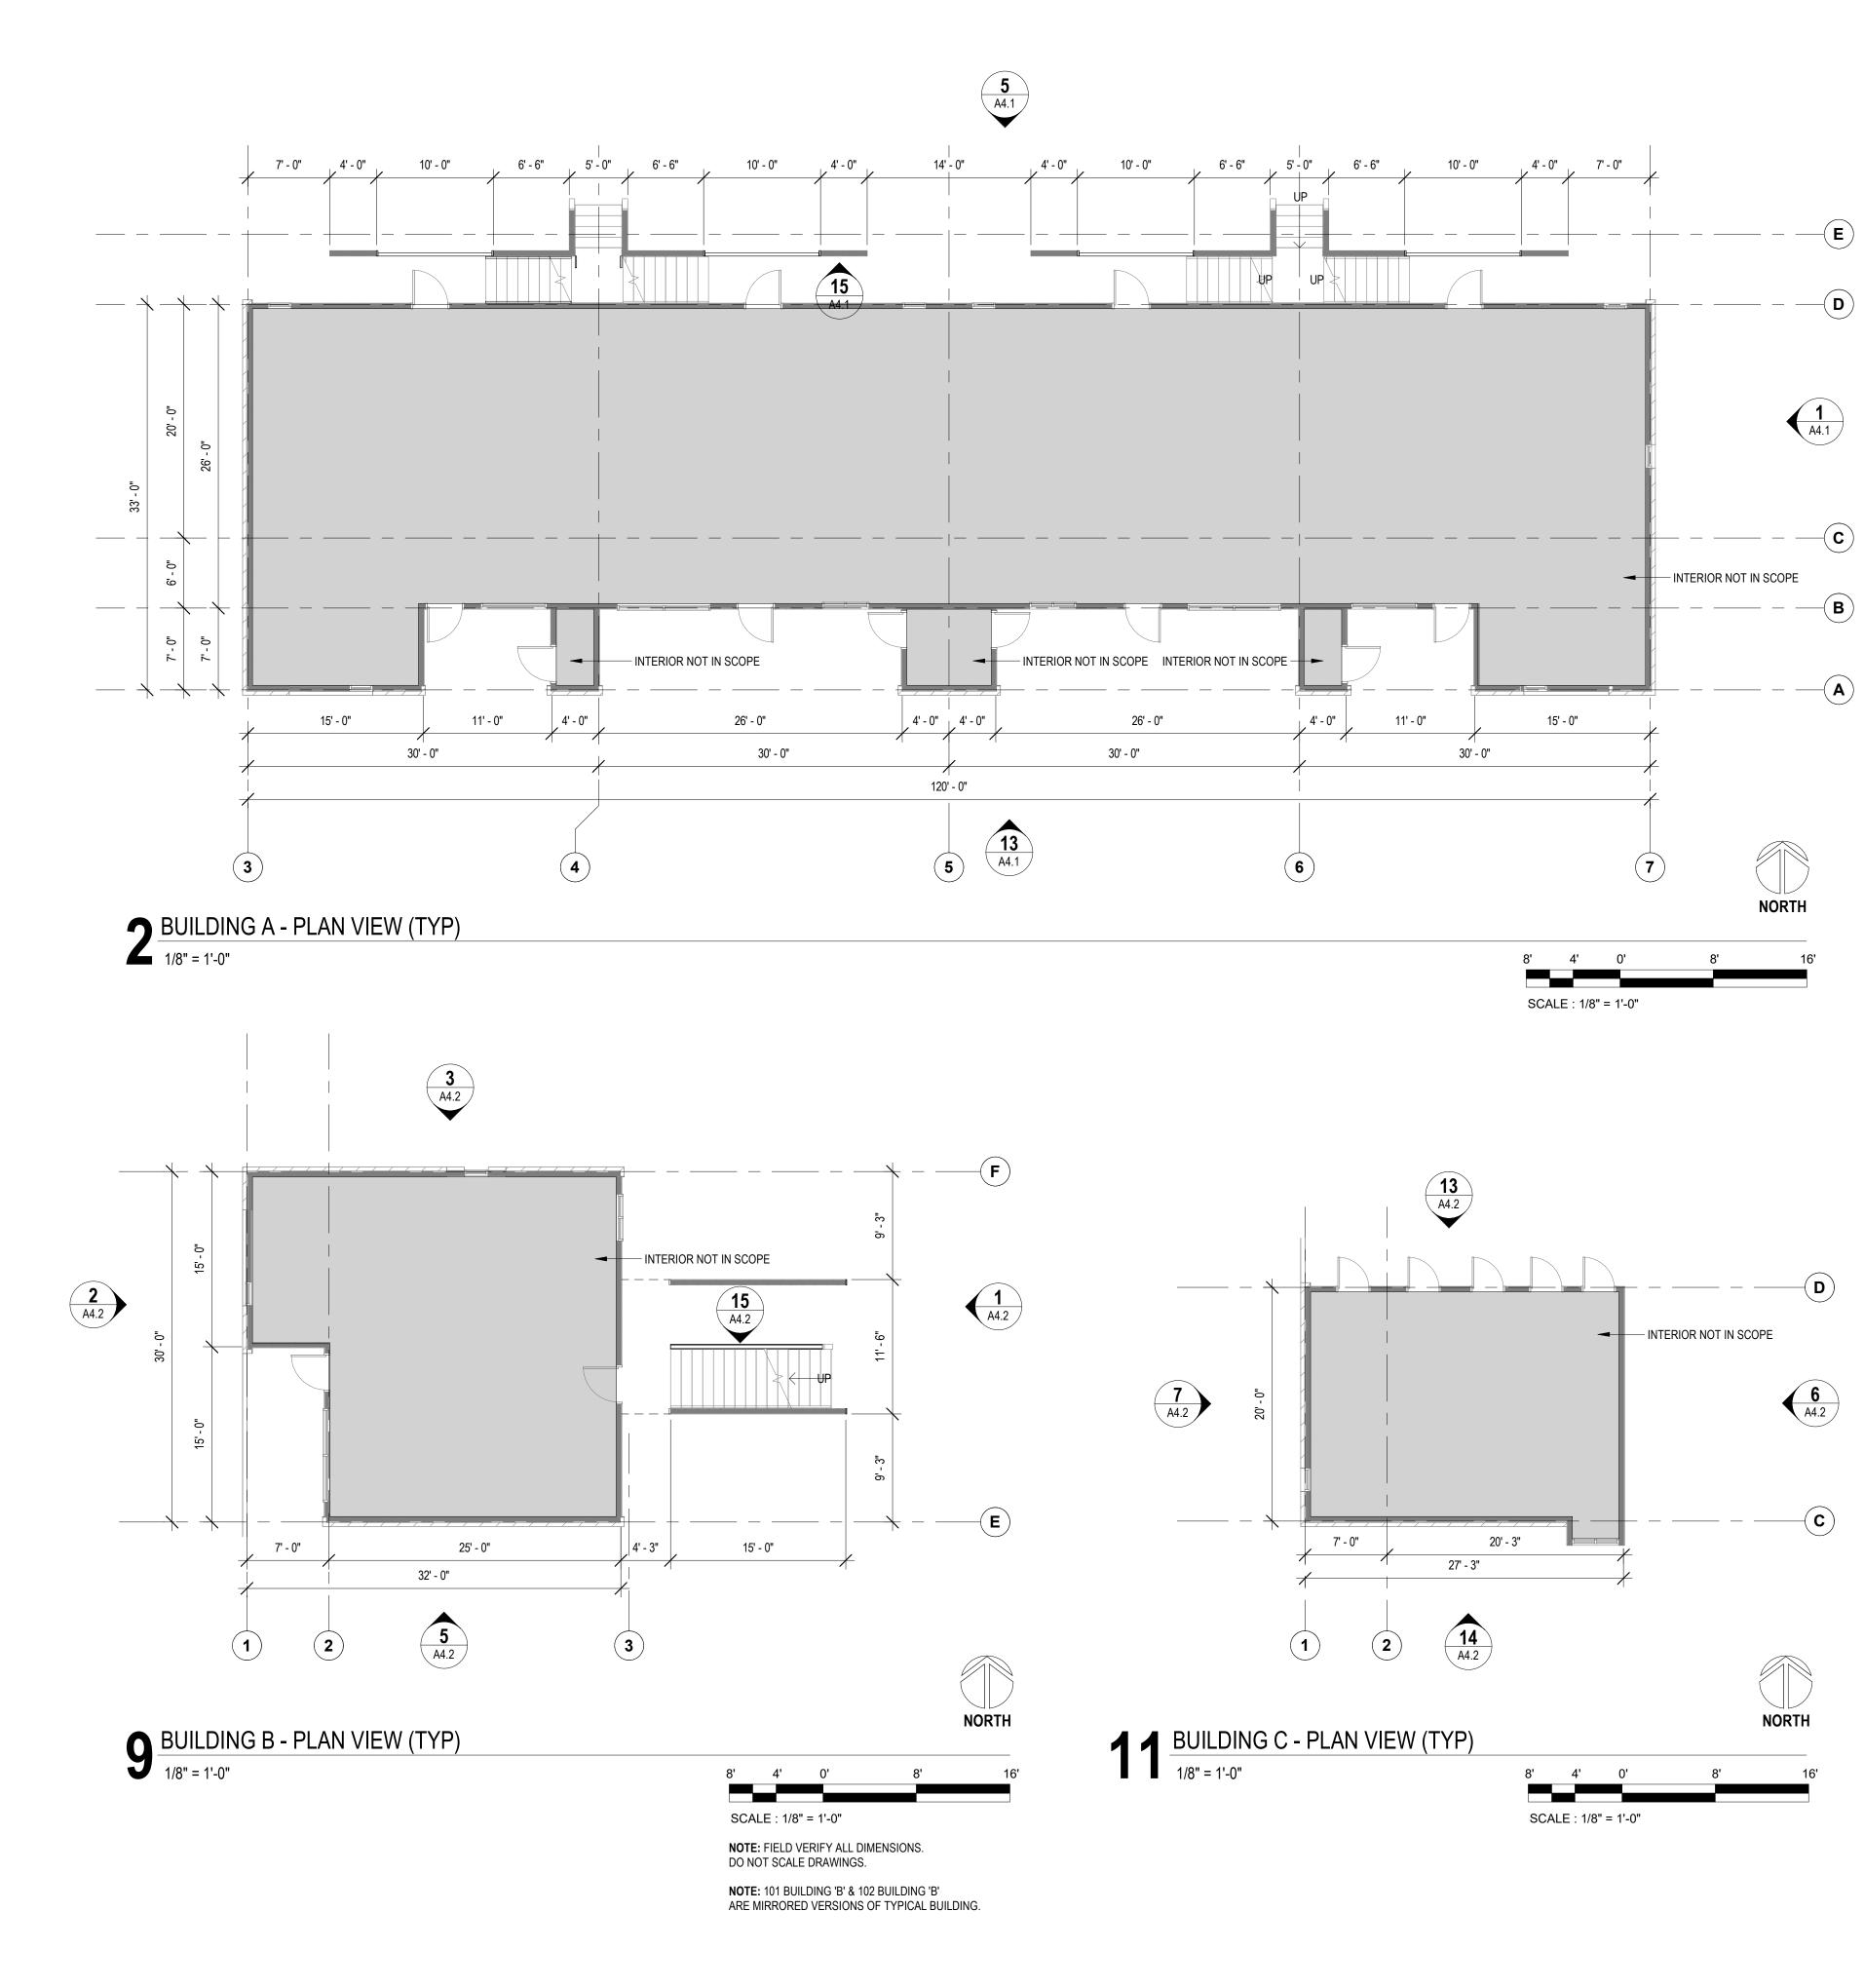

GENERAL NOTES

1. 101 BUILDING 'B/C' & 102 BUILDING 'B/C' ARE MIRRORED VERSIONS OF TYPICAL BUILDING.

KEYNOTES

FLOOR PLAN NOTES

1. THE CONTRACTOR SHALL NOT CONSIDER CONSTRUCTION NOTES TO BE ALL-INCLUSIVE. IT IS THE CONTRACTOR'S RESPONSIBILITY TO INSPECT AND ASSESS EACH AREA AND TO FULFILL THE INTENT OF THE CONTRACT DOCUMENTS. CONTRACTOR SHALL COORDINATE ARCHITECTURAL CONSTRUCTION DRAWINGS AND NOTES WITH CIVIL, STRUCTURAL, MECHANICAL, ELECTRICAL, & PLUMBING NOTES AND DRAWINGS AND PROJECT MANNUAL.

2. FIELD VERIFY ALL DIMENSIONS. DO NOT SCALE DRAWINGS.

3. ALL FINISHES AND MATERIALS SHALL BE PROPERLY INTEGRATED TO ENSURE A UNIFORM APPERANCE AND SEAMLESS TRANSITION.

4. ALL DIMENSIONS ARE FROM STRUCTURAL OR UNFINISHED FACE OF STUD, UNLESS OTHERWISE NOTED.


5. PATCH AND REPAIR ANY / ALL WALL SURFACES AS REQUIRED TO PROVIDE SUITABLE SUBSTRATE FOR FINISHES.

6. NOTE: TENANTS WILL OCCUPY THE BUILDINGS. PLEASE SEE NOTICE OF OCCUPANCY LETTER IN THE BID DOCUMENTS.

	STATE UNIVERSITY
	MSU-CPDC Montana state university Bozeman, montana Phone: 406.994.5413 FAX: 406.994.5665
BID/PERMIT SET	MSU PAISLEY COURT HOUSING
BID	
	DRAWN BY: Author REVIEWED BYChecker REV. DESCRIPTION DATE
	PPA #: 21-0143 A/E # 21-0143
	A&E PROJ #: 23123.00 SHEET TITLE
	LEVEL 1 FLOOR PLAN SHEET
	A2.1
	DATE 03/29/24

3 105 (BUILDING B) 2 - 3 105 (BUILDING C) 2 (1)

ROOF 1/8" = 1'-0"

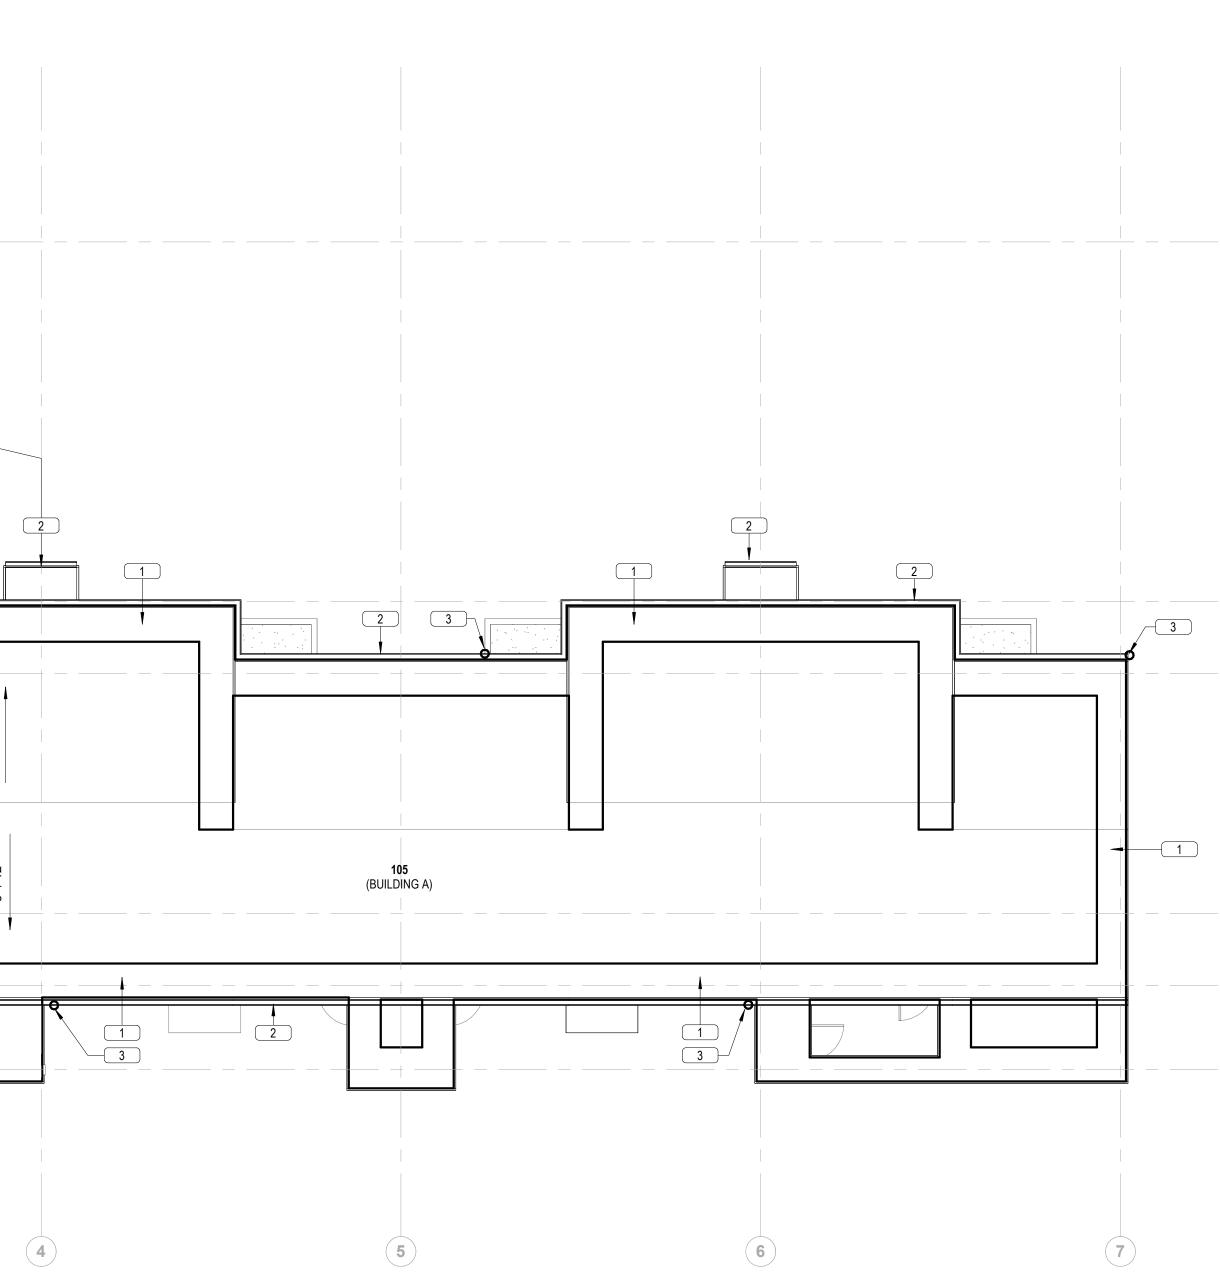


MONT. STATE UNIV **KEYNOTES** 1 **ALTERNATE #1**: PROVIDE NEW UNDERLAYMENT LAPPED OVER EXISTING AND NEW SHINGLES TO MATCH EXISTING. 2 PROVIDE AND INSTALL NEW GUTTER. AF THE ST 3 PROVIDE AND INSTALL NEW DOWNSPOUT AT THIS LOCATION. MSU-CPDC MONTANA STATE UNIVERSITY BOZEMAN, MONTANA PHONE: 406.994.5413 FAX: 406.994.5665 O/PERMIT SET MSU PAISLEY COURT HOUSING BID DRAWN BY: Author REVIEWED BYChecker REV. DESCRIPTION DATE PPA #: 21-0143 A/E # 21-0143 A&E PROJ #: 23123.00 SHEET TITLE **ROOF PLAN** SHEET A2.2 DATE


03/29/24


(E


D


NORTH

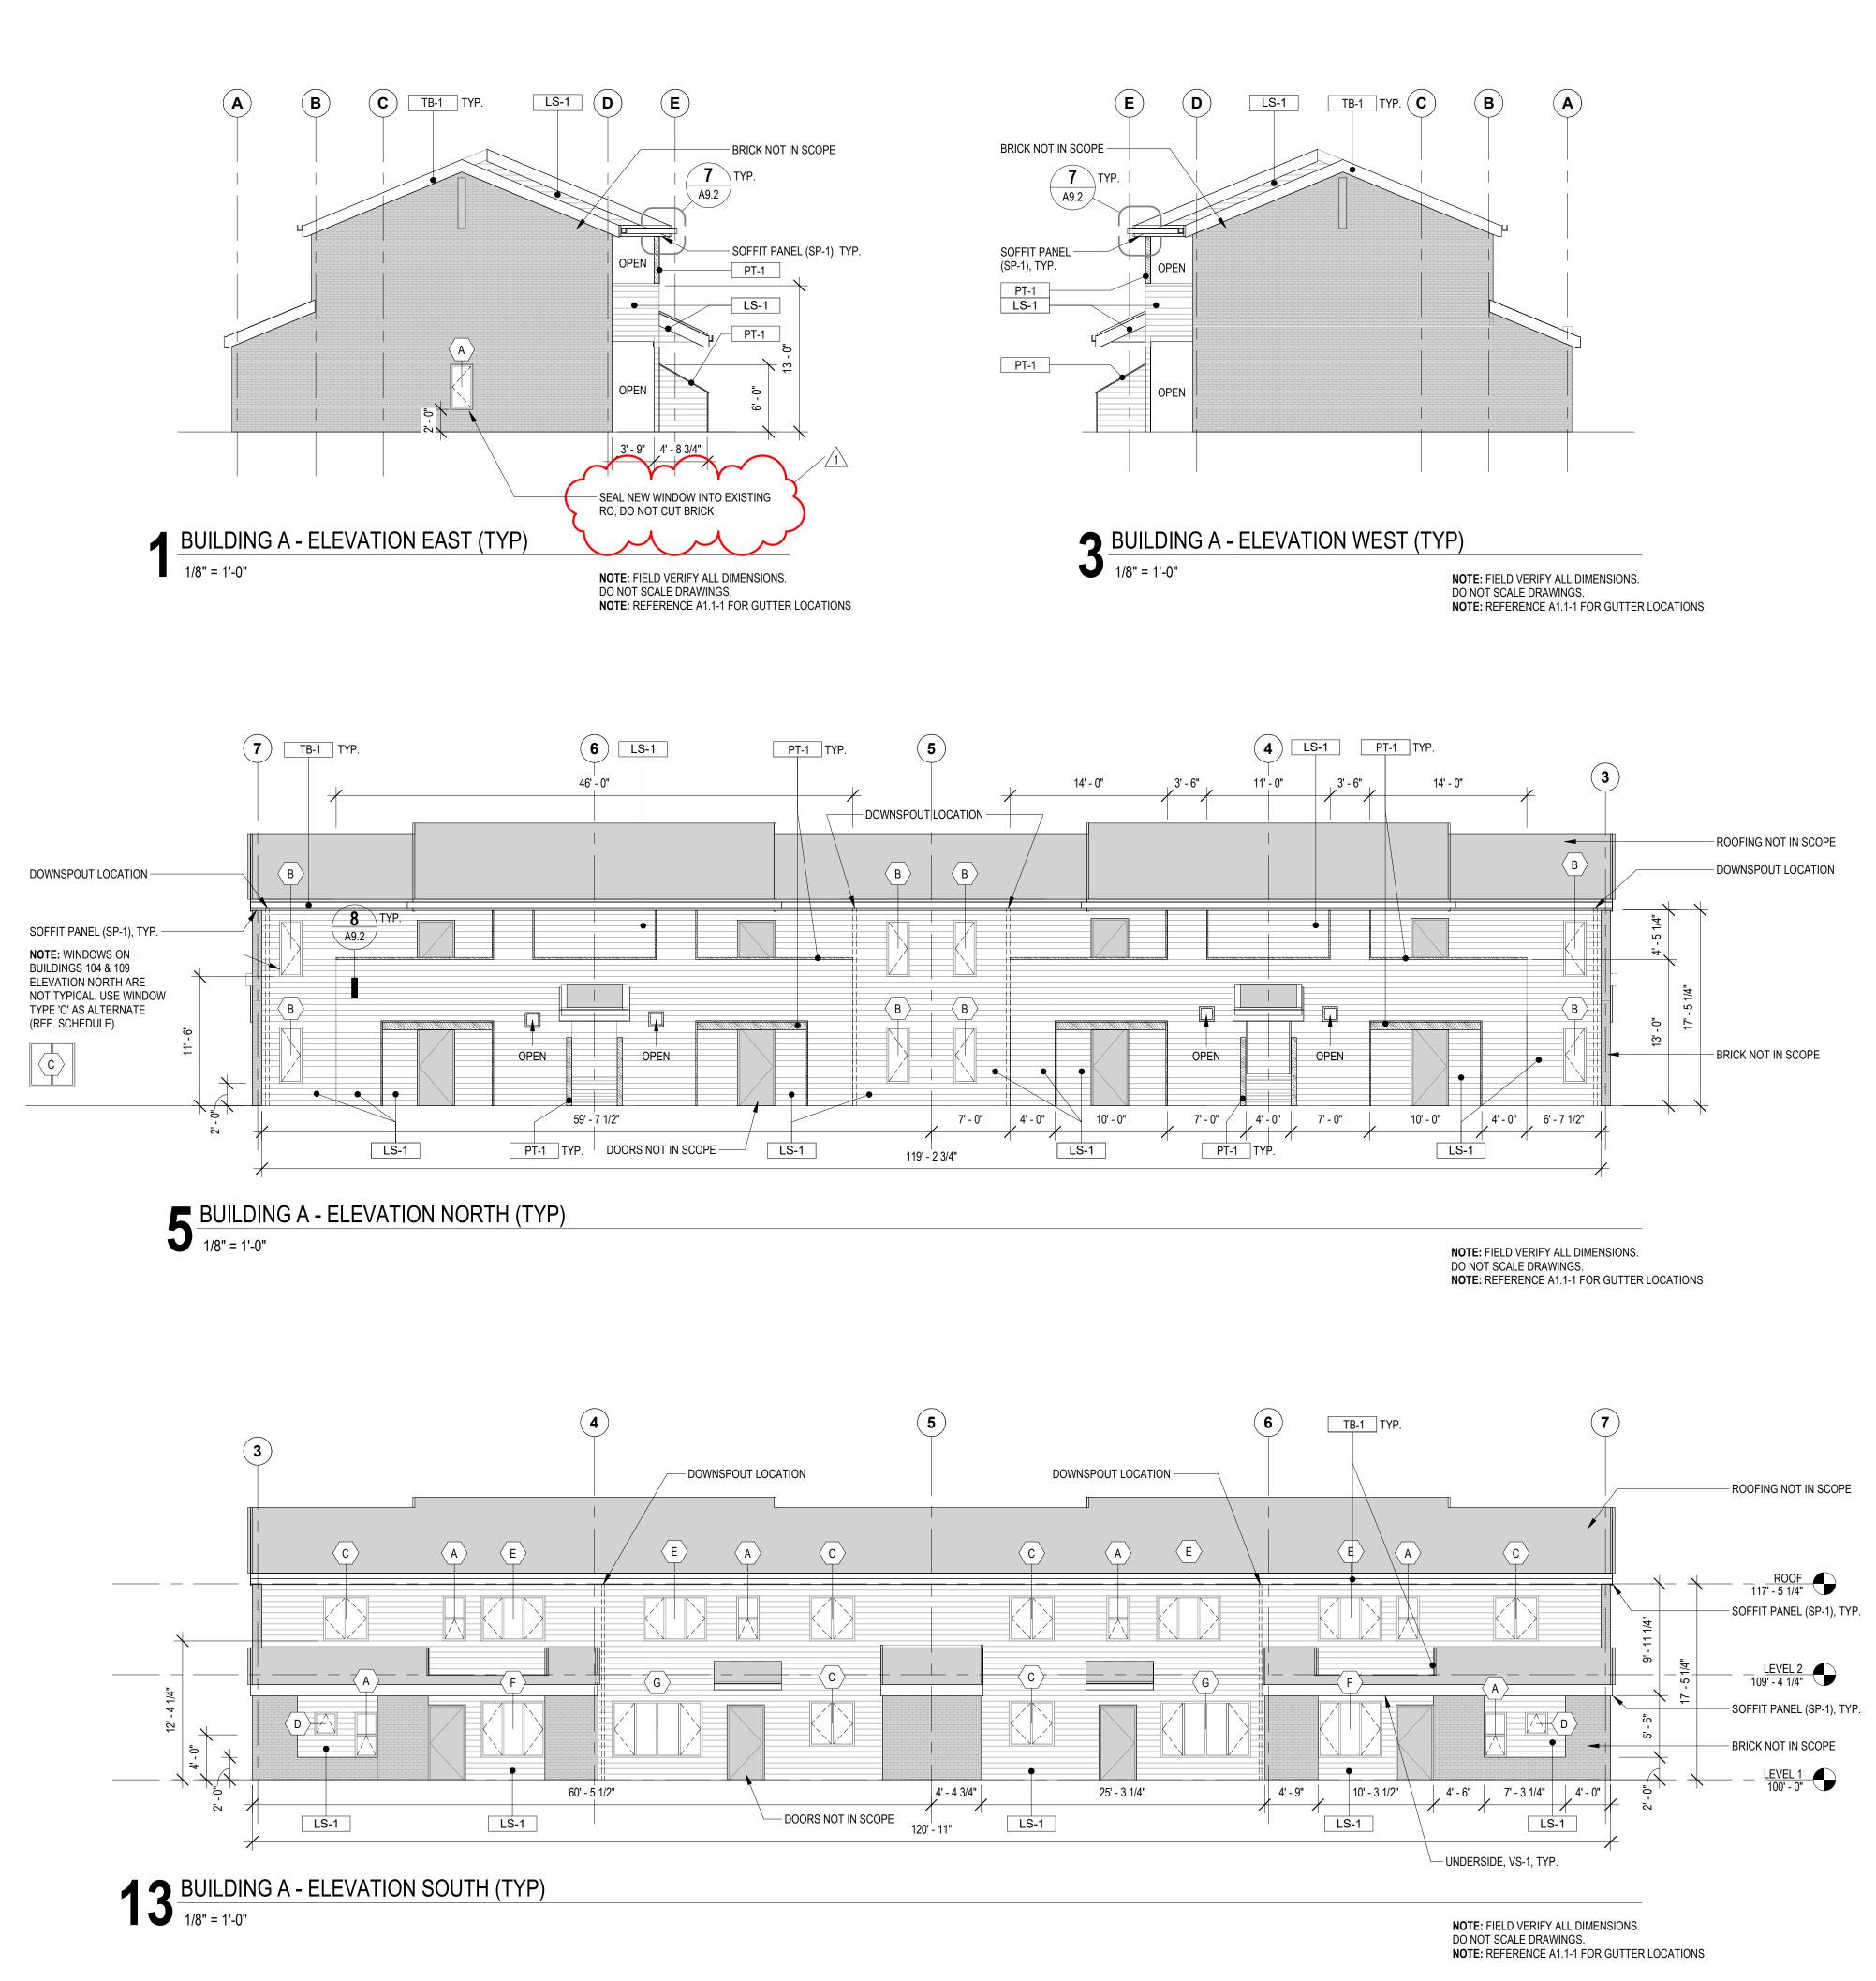

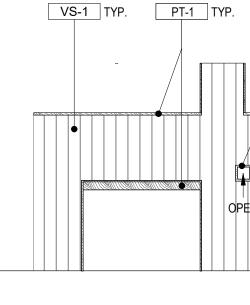

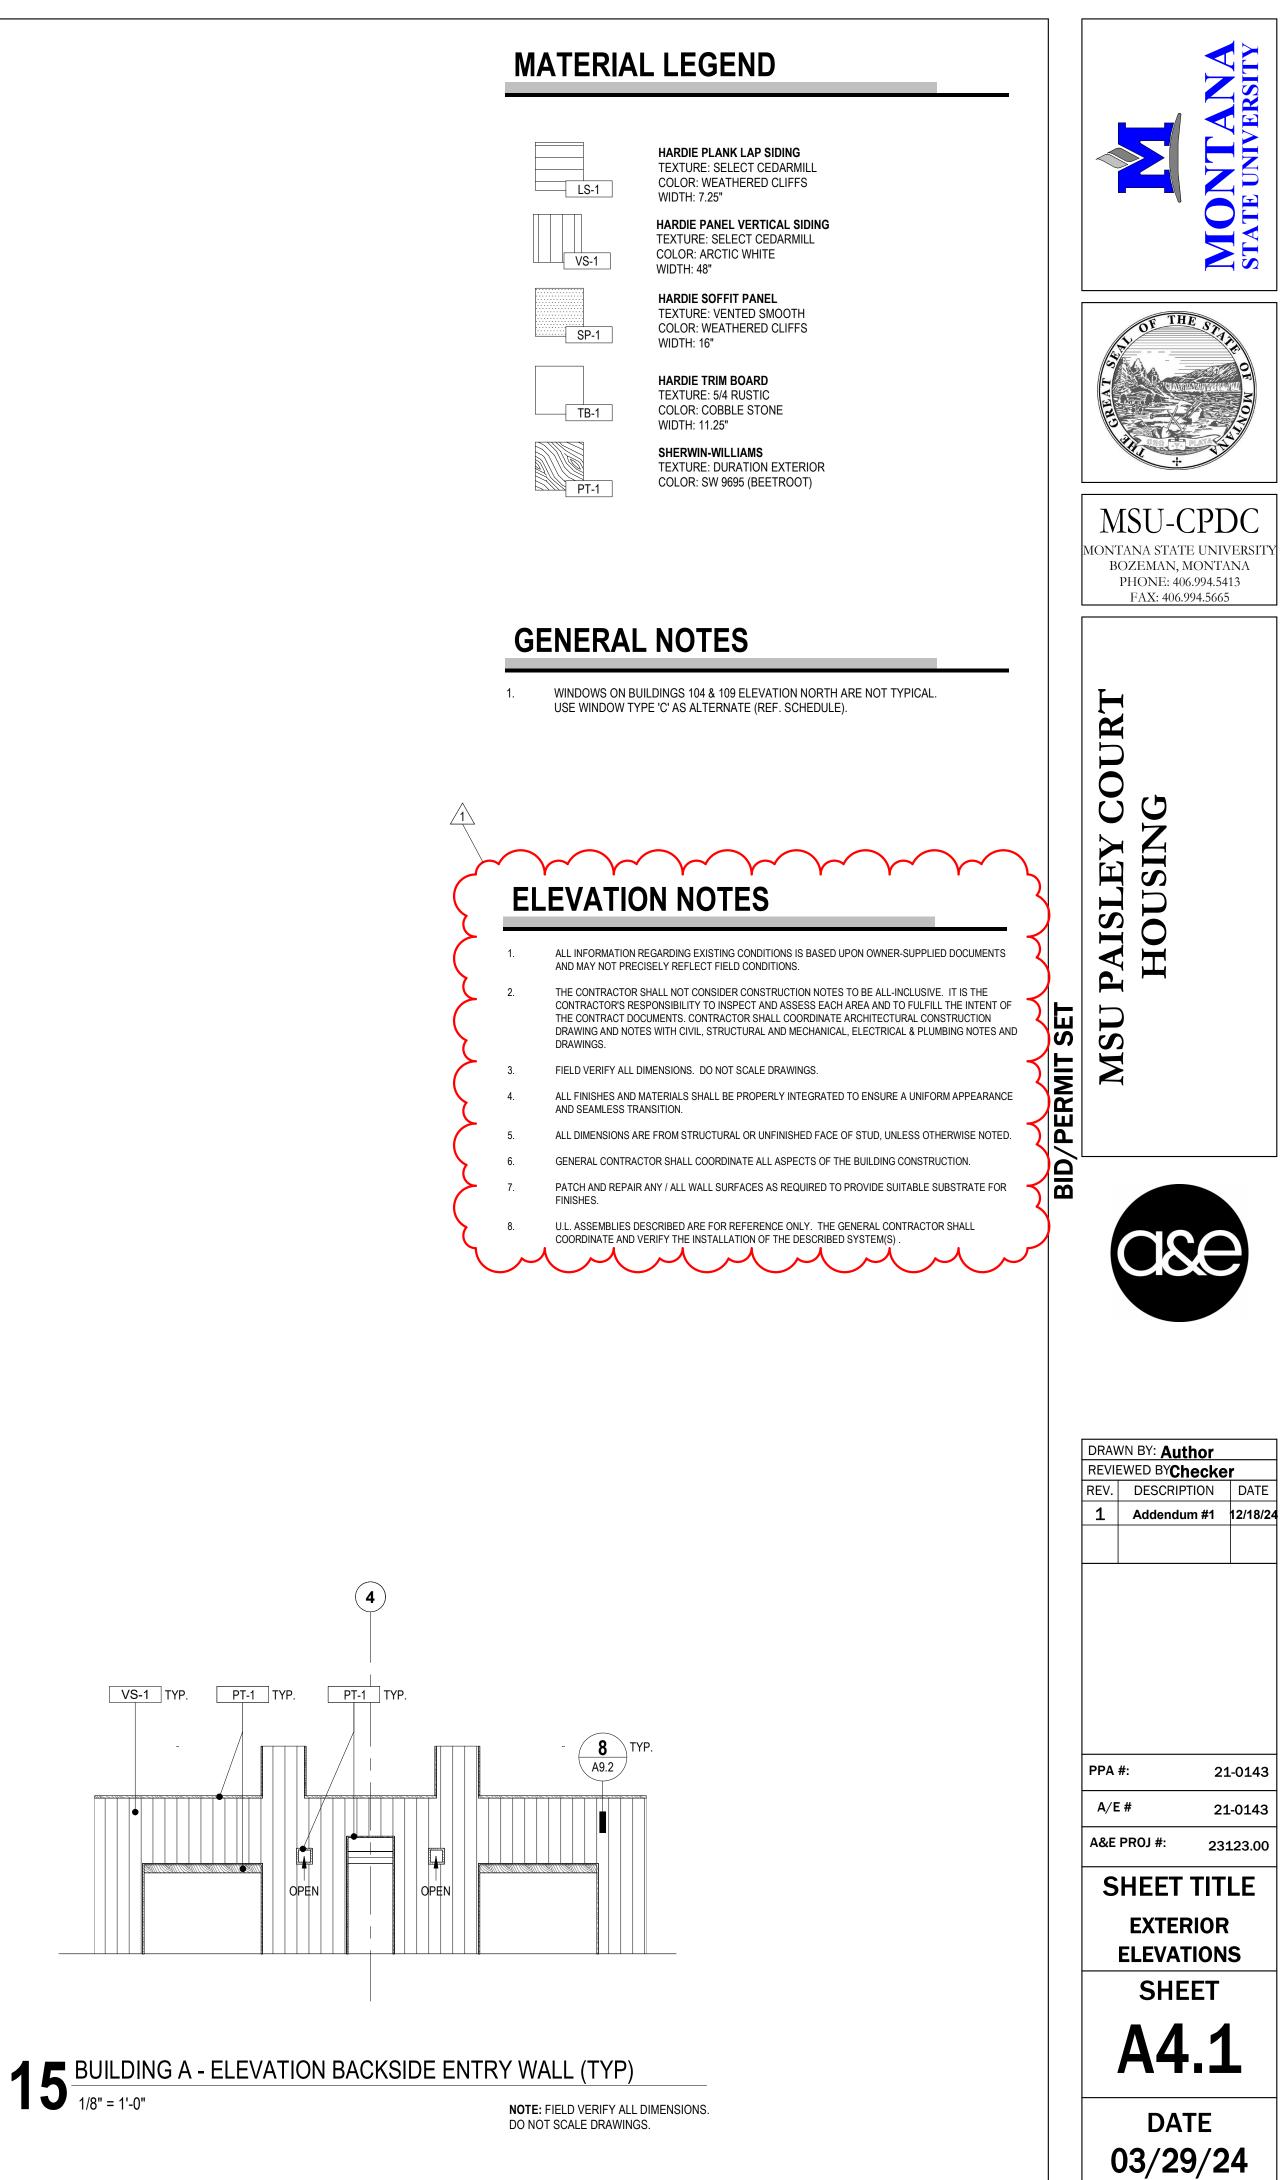

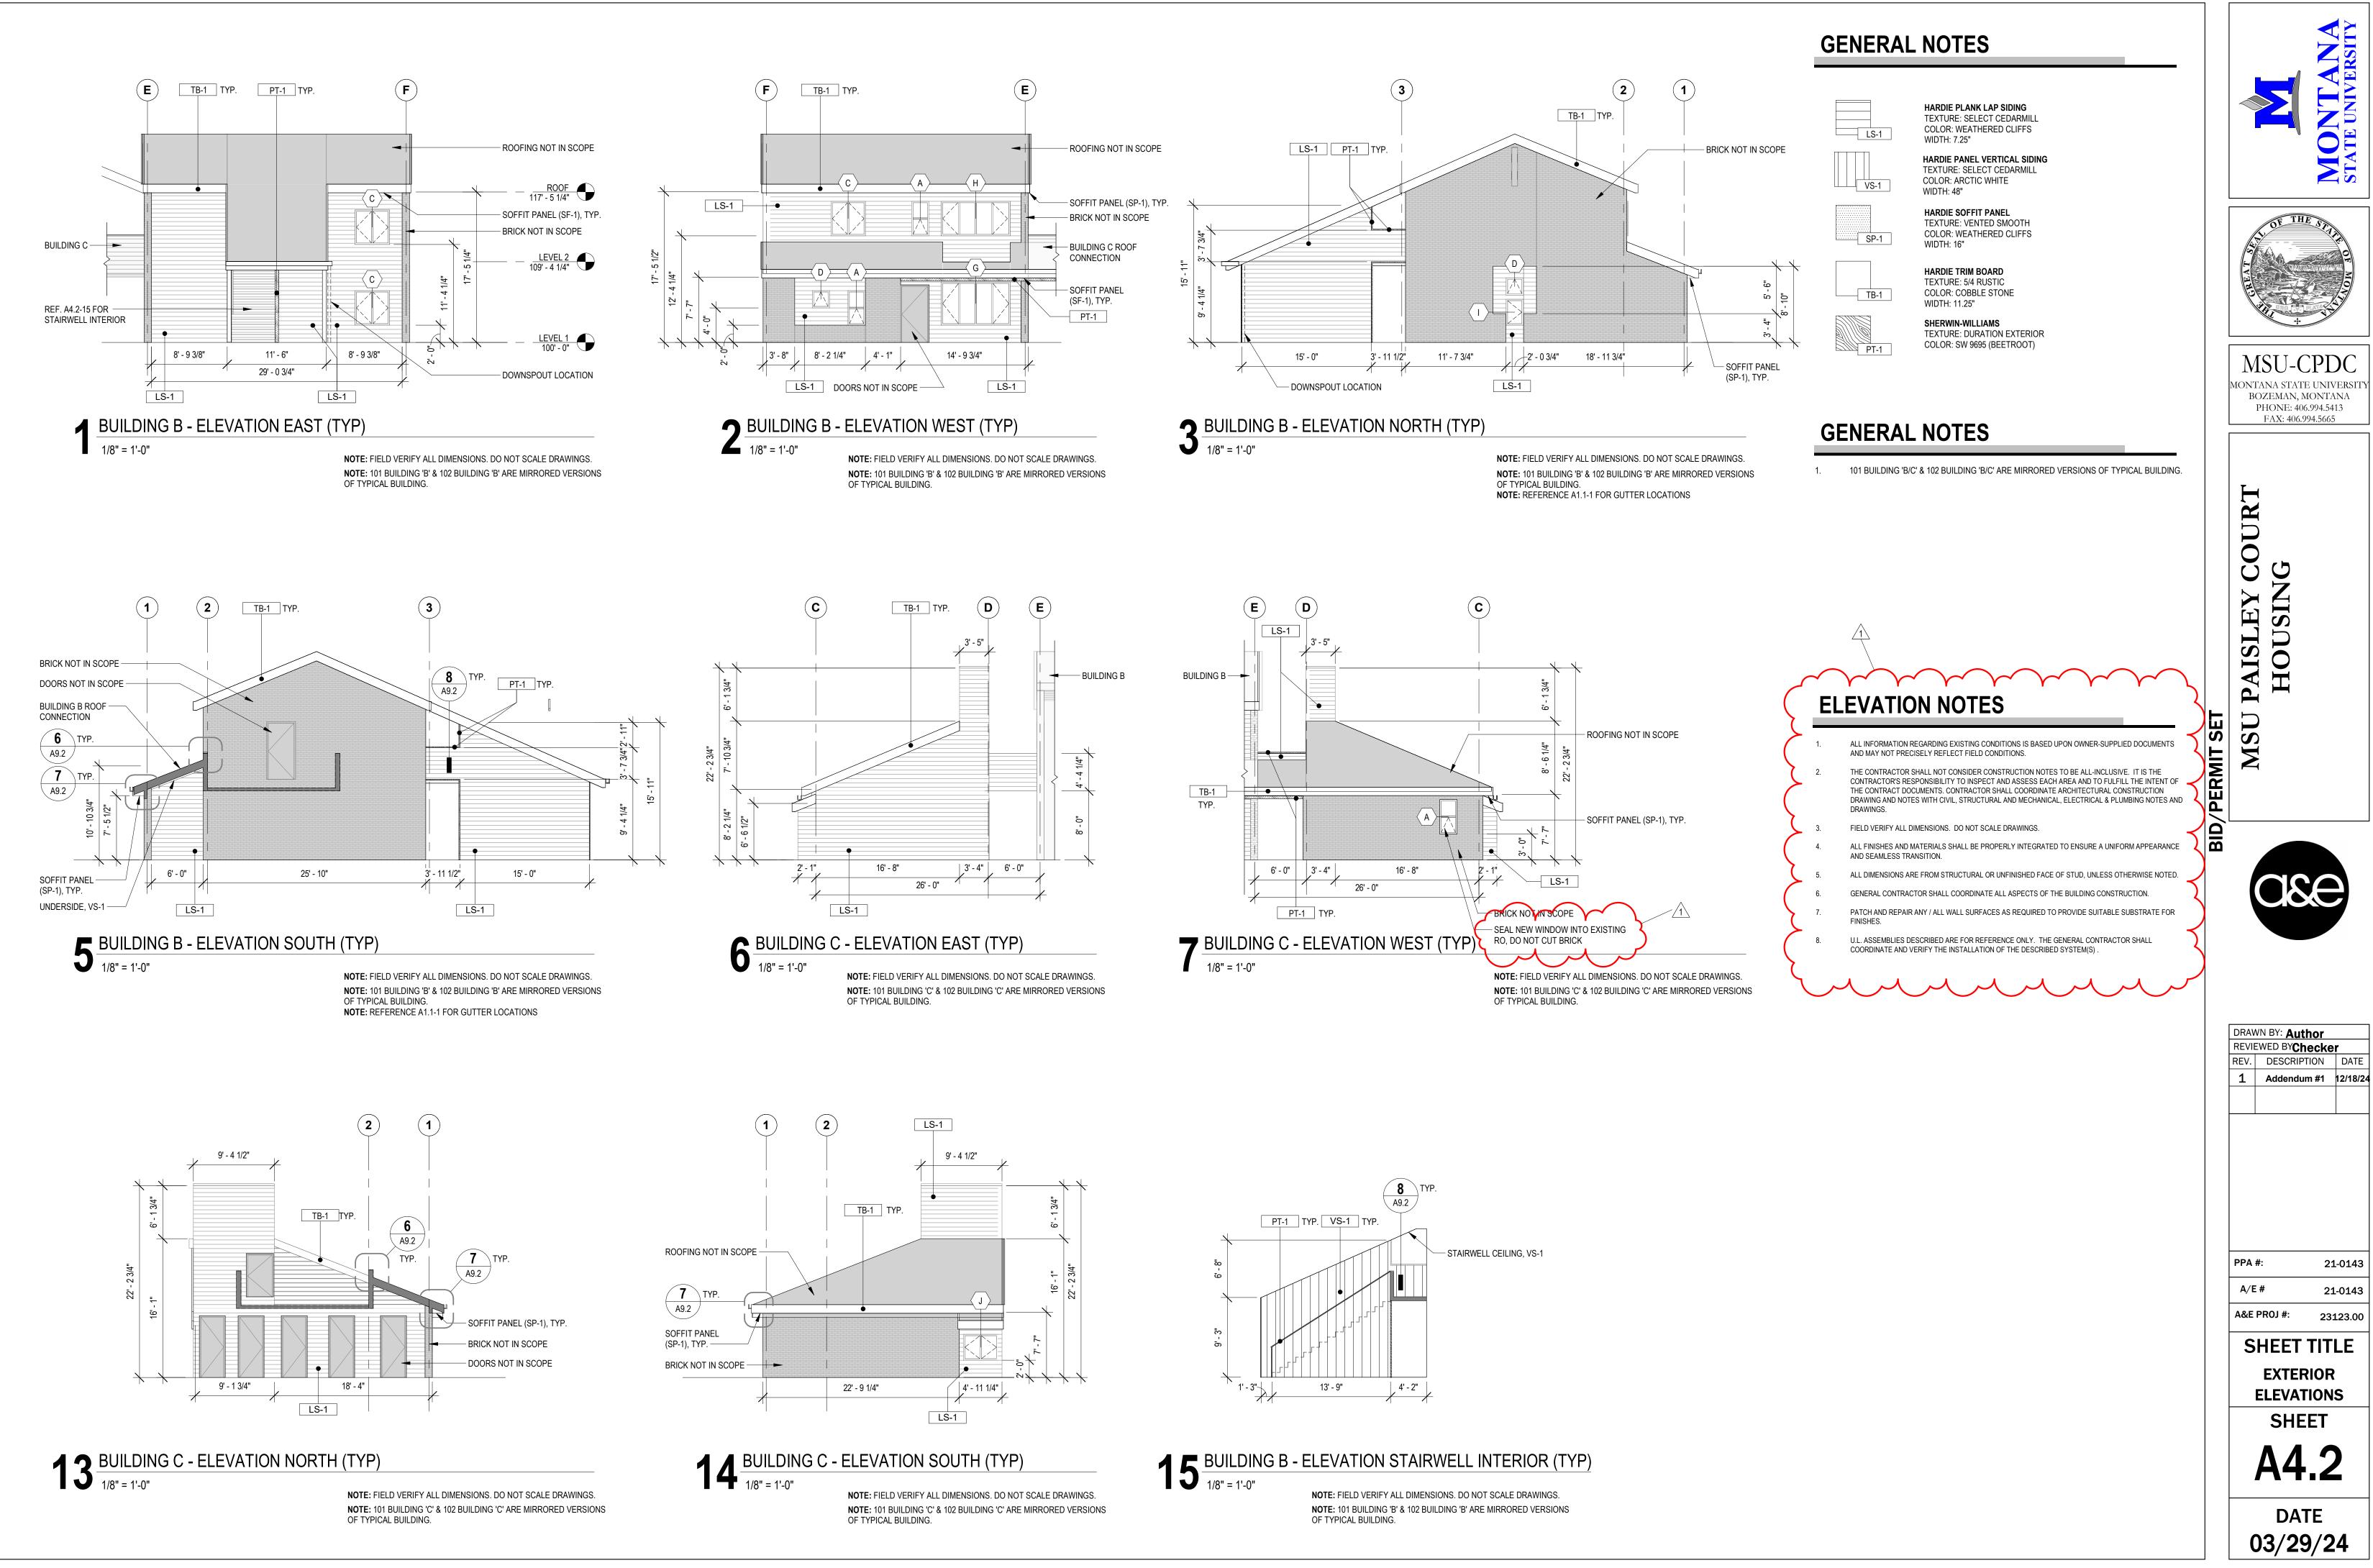

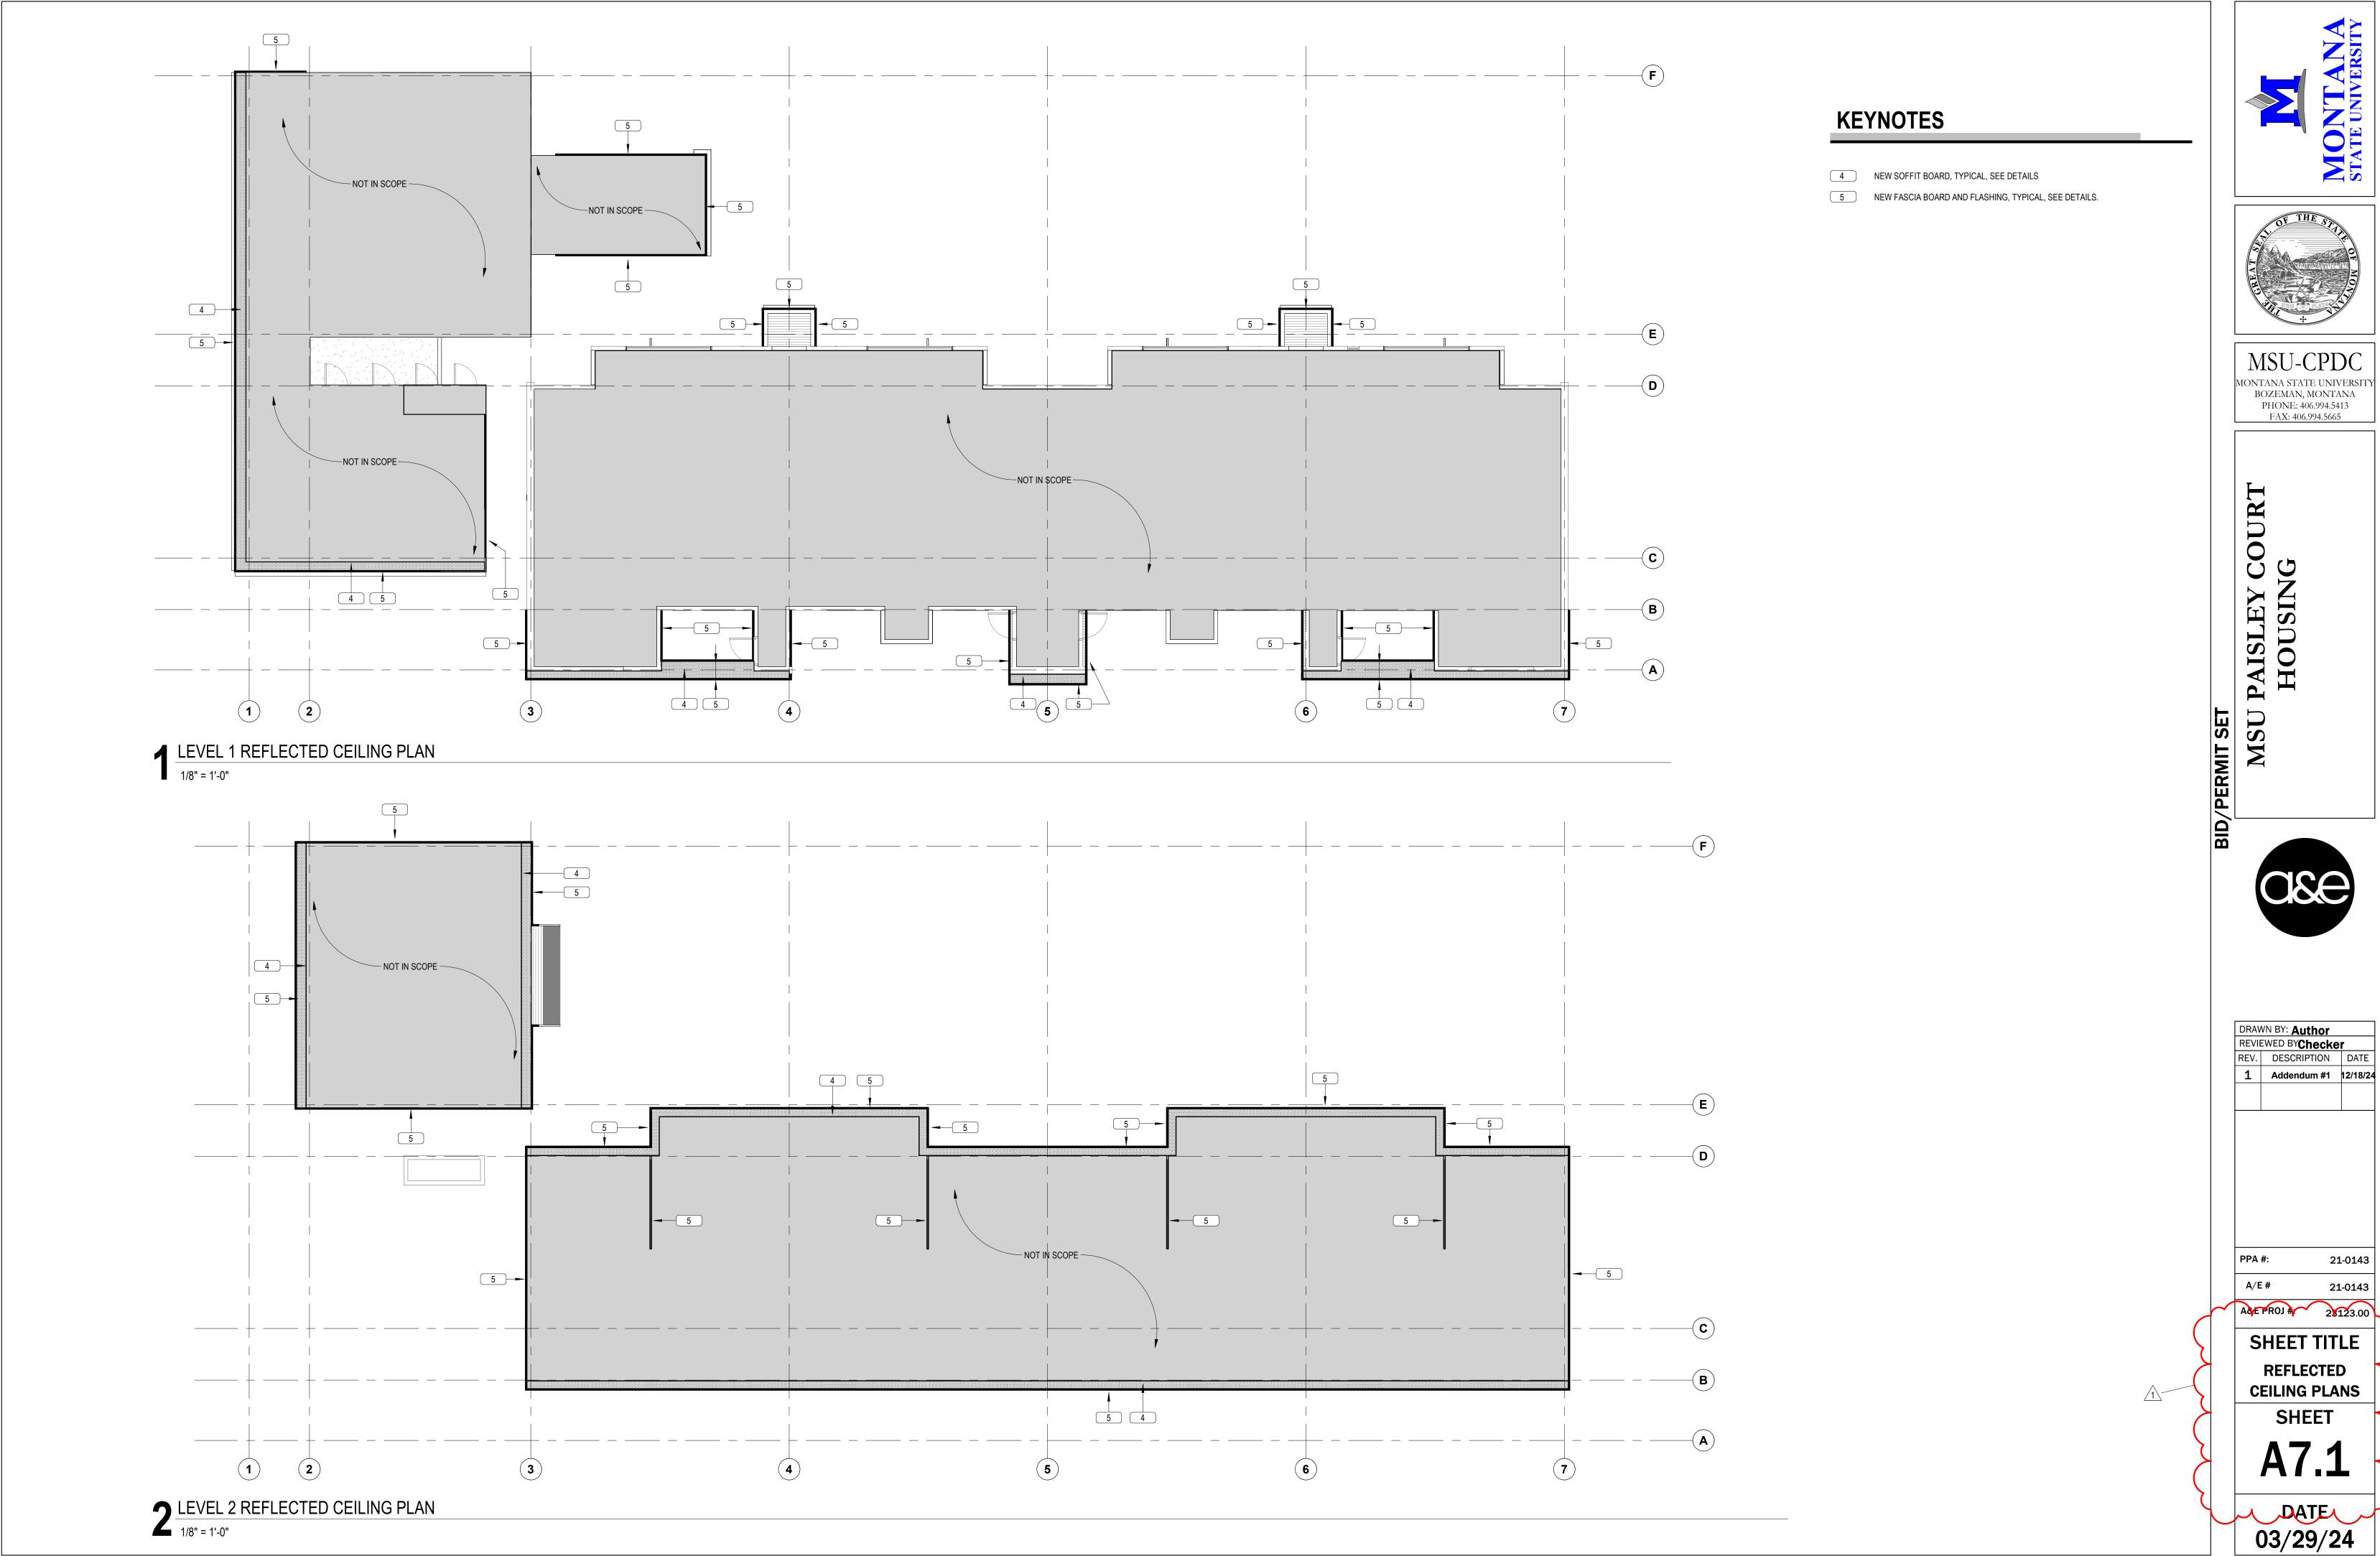






	WINDOW SCHEDULE				
WINDOW NUMBER	WIDTH	HEIGHT	SILL HEIGHT	HEAD HEIGHT	GLAZING TYPE
A	2' - 0"	4' - 0"	<varies></varies>	<varies></varies>	GL-1
В	2' - 0"	5' - 0"	<varies></varies>	<varies></varies>	GL-1
С	4' - 0"	4' - 0"	<varies></varies>	<varies></varies>	GL-1
D	2' - 0"	2' - 0"	<varies></varies>	<varies></varies>	GL-1
E	5' - 8"	4' - 0"	3' - 0"	7' - 0"	GL-1
F	5' - 8"	5' - 0"	2' - 0"	7' - 0"	GL-1
G	8' - 0"	5' - 0"	<varies></varies>	<varies></varies>	GL-1
Н	8' - 0"	4' - 0"	3' - 0"	7' - 0"	GL-1
1	2' - 0"	3' - 0"	2' - 0"	5' - 0"	GL-1
J	4' - 0"	3' - 0"	2' - 0"	5' - 0"	GL-1

WINDOW TYPE ELEVATIONS - VIF

NOTE: FIELD VERIFY ALL DIMENSIONS. DO NOT SCALE DRAWINGS.

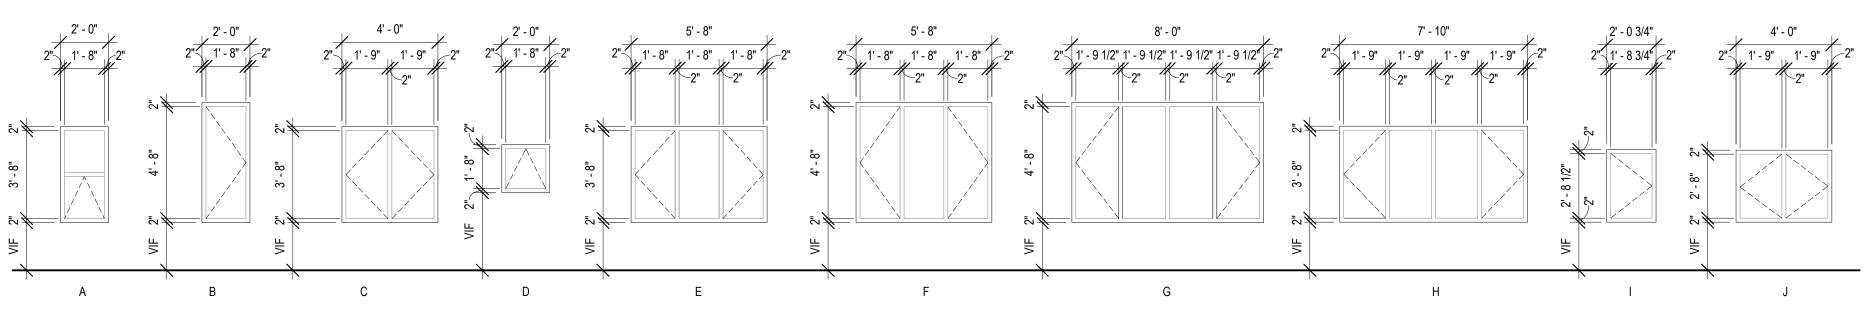

GLAZING NOTES

1. GLAZING TO BE GL-1 UNLESS OTHERWISE SPECIFIED. 2. REFERENCE EXTERIOR ELEVATION FOR OPERABLE WINDOW OPENING DIRECTIONS.

	STATE UNIVERSITY
	MOLL CDDC
	MSU-CPDC Montana state university Bozeman, montana Phone: 406.994.5413 FAX: 406.994.5665
BID/PERMIT SET	MSU PAISLEY COURT HOUSING
	DRAWN BY: Author REVIEWED BYChecker REV. DESCRIPTION DATE
	PPA #: 21-0143 A/E # 21-0143
	A&E PROJ #: 23123.00 SHEET TITLE
	SHEET
	A9.1
	DATE 03/29/24

